

TURNING INFORMATION INTO PROFITS

# Product Portfolio

## Technical Catalogue

2022 FEBRUARY EDITION

FEBRUARY 2022



**METOS<sup>®</sup>**  
BY PESSL INSTRUMENTS

# Stations & Dataloggers

**iMETOS VWS - Virtual Weather Station**

**MiniMETOS SOIL**

**nMETOS**

**µMETOS NB-IoT**

**µMETOS SOIL LoRa**

**µMETOS CLIMA LoRa**

**LoRATH**

**LoRAIN**

**iMETOS 3.3**

**INTERFACES**

**iMETOS ICA10 NB-IoT**

**iSCOUT®**

**CropVIEW®**

**iMETOS WorkTrack**

**iMETOS Beacon**

**iMETOS MobiLab**

**Dualex**

**iMETOS SoilGuard**

**SolAntenna**

**METOS® AOS**

## **FAMILY NAME: Virtual Weather Station**

The perfect entry point to precision agriculture. Use simulated data, calculated by highly reliable meteoblue weather models for any point on earth.

### **BEST USED FOR:**

- Flat terrain monitoring
- No sensors = no maintenance
- Offers the same range of solutions as an actual weather station

### **APPLICATIONS:**

Agriculture (crop growing), golf courses, parks, smart cities.

### **FAMILY MEMBERS:** iMETOS VWS




# iMETOS VWS - Virtual Weather Station

Virtual Stations exist for any point on the earth, for which meteoblue can derive weather data. The data is not the result from an actual METOS® station measurement, but consists of simulated data, calculated by highly reliable meteoblue weather models.

In some terrains, such as flatlands, the calculated data is highly accurate with minimal discrepancies to actual values, such as temperature or precipitation. These are the regions where virtual stations prove to be a great asset.

In cases where terrain is more complex or the discrepancies to actual values are not acceptable because the risk is too high, an METOS® station needs to be installed.

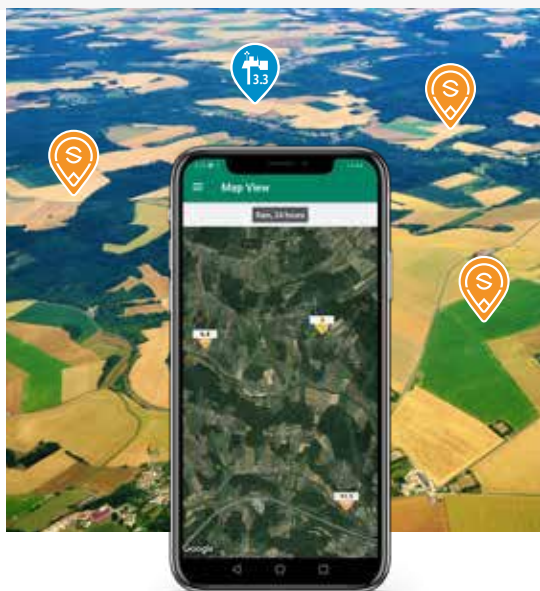








## iMETOS VWS vs METOS IoT STATION

	Virtual station	METOS IoT Stations
<b>Variables</b>	Same parameters as iMETOS IMT300 + soil temperature	Based on sensor set
<b>Precision</b>	Limited	High
<b>Availability</b>	Anywhere in the world	Only where the station is installed
<b>Terrain</b>	Not complex terrain	Any terrain
<b>Maintenance</b>	No maintenance	Regular hardware maintenance necessary
<b>Suitability for high value decisions (frost, water management etc.)</b>	Limited	High

Order number: 800005

## DATA QUALITY

Air temperature	
Relative humidity	
Solar radiation	
Wind speed	
Precipitation	
Leaf wetness	
Soil temperature	

With actual case studies, iMETOS VWS is under continuous improvements.

**VIEW RESULTS ON OUR WEBSITE:**




## MAIN FEATURES

Calculated sensor variables equal to iMETOS IMT300 sensor set: wind speed, solar radiation, soil temperature, air temperature, precipitation, relative humidity and leaf wetness, along with calculated values of ET<sub>0</sub>, vapor-pressure deficit (VPD) and Delta T. All data and decision support services are accessible online through FieldClimate platform.

## THE ADVANTAGES



**A perfect entry into precision agriculture with no maintenance cost**



**Offers the same range of solutions as an actual weather station**



**Very cost effective, simple to use and activated with just a few clicks on the computer or phone**



**Works as a complete decision support service - provides weather forecast, offers disease models and helps with work planning**

## **FAMILY NAME: Entry Level IOTs**

Compact, cost effective, small, quick to install, and designed for large-scale deployment everywhere intelligent IOTs are needed.

### **BEST USED FOR:**

- Field operations planning (workforce allocation, spray and irrigation planning)
- Improving plant protection with disease models
- Reducing the risk for animal health problems

### **APPLICATIONS:**

Agriculture (crop growing, animal production), golf courses, parks, smart cities, indoor monitoring, Country-wide Rainfall Networks.

**FAMILY MEMBERS:** MiniMETOS, nMETOS variations

# MiniMETOS SOIL




MiniMETOS SOIL is a combination of most essential sensors for irrigation and stress management.

It permanently measures soil temperature & volumetric water content (VWC) with Pessl Instruments Soil Moisture Sensor PI54-D and Watermark (soil moisture suction) in near real-time wherever you want. The installation of a logger can be completely underground (invisible); therefore, it is a perfect installation for golf courses, parks, home & garden, as well as in agriculture where vandalism and theft could be a problem.

The device is battery powered with a lifespan between 6 to 12 months, and provides

actionable data, such as the exact amount of soil moisture and the soil temperature in each inch/cm of the measurement area, to help you plan the irrigation event and to warn you about possible stress points in a timely fashion.

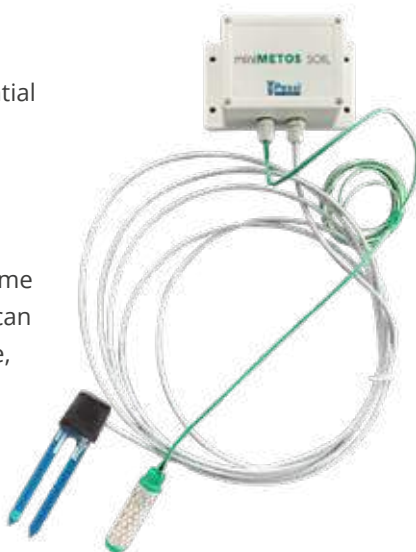

## TECHNICAL SPECIFICATIONS

<b>Housing</b>	UV resistant polycarbonate plastic (Protection class IP67)
<b>Dimensions</b>	14.8 cm L x 11.8 cm W x 9.3 cm H
<b>Weight</b>	0.25 kg
<b>Connectivity</b>	<b>NB-IoT/CatM1:</b> Category: Cat-M1/NB1 Frequency Band: B1, B2, B3, B4, B5, B8, B9, B10, B12, B13, B14, B17, B18, B19, B20, B25, B26, B27, B28, B66
<b>Power supply</b>	3.6V primary battery cell
<b>Measuring interval</b>	15 minutes
<b>Logging interval</b>	15 minutes
<b>Communication interval</b>	60 minutes
<b>SENSORS</b>	
<b>PI54-D</b>	see page 116
<b>Watermark</b>	see page 122

Order number: 7000047 (HL7800), 7000048 (HL7802)

**With MiniMETOS SOIL all the potential issues and stress events can be identified before they occur or become visible.**

## KEY FEATURES:

- Permanent measurement of the soil moisture and soil temperature at any of your locations
- Invisible, so it doesn't affect the workers and the aesthetic of location (golf course, park etc.)
- No solar panel needed as long life battery powered based on the latest power harvesting technology
- 6 to 12 months of battery life and quick installation
- Cost-effective and durable
- Prevents possible vandalism



## INSTALLATION ON GOLF COURSE

Laying the cable - inserting the sensors in the main turf root zone.



Preparation of the irrigation box for the data logger.



Re-installing the lawn tiles to cover the sensors. 14 days later - "invisible".



# nMETOS

## 100, 180, 180SM, 200



nMETOS is the latest generations of weather stations that operates on NB-IoT network and can be connected to any existing NB-IOT/CAT-M/GPRS network. nMETOS can measure rainfall, air and soil temperature, relative humidity, leaf wetness, and soil moisture. All the data is synchronized within FieldClimate.



## TECHNICAL SPECIFICATIONS

<b>Housing</b>	UV resistant polycarbonate plastic (Protection class IP65)
<b>Dimensions</b>	22.5 cm L x 17 cm W x 18 cm H
<b>Weight</b>	1,10 kg
<b>Connectivity</b>	<b>NB-IOT/CAT-M/GPRS:</b>
	Category: Cat-M1/NB1
	Frequency Band: B1, B2, B3, B4, B5, B8, B9, B10, B12, B13, B14, B17, B18, B19, B20, B25, B26, B27, B28, B66
<b>Power supply</b>	3.6V primary battery cell
<b>Measuring interval</b>	15 minutes
<b>Logging interval</b>	15 minutes
<b>Communication interval</b>	60 minutes
<b>SENSORS</b>	
<b>Rain Gauge</b>	<b>Sensitivity:</b> 1 tip per 0.2 mm
<b>Air Temperature</b>	<b>Operating temperature range:</b> -40 °C to +125 °C
	<b>Thermometer error -10 °C to +85 °C:</b> +/- 0.3 °C
<b>Relative humidity</b>	<b>Precision 0 - 80 %:</b> +/- 2 %; <b>Precision 80 - 100 %:</b> +/- 3 %

NB-IoT is a default connectivity with nMETOS.

# nMETOS

## 100, 180, 180SM, 200

Order number:  
700220 (HL7800)  
700221 (HL7802)



### nMETOS 100

Rain gauge.

Order number:  
700222 (HL7800)  
700223 (HL7802)



### nMETOS 180

Rain gauge, air temperature, air humidity and calculated sensors: leaf wetness, dew point, VPD and Delta T.

Order number:  
700224 (HL7800)  
700225 (HL7802)



### nMETOS 180SM

Rain gauge, air temperature, air humidity, soil moisture and calculated sensors: leaf wetness, dew point, VPD and Delta T.

Order number:  
700228 (HL7800)  
700229 (HL7802)



### nMETOS 200

Rain gauge, air temperature, air humidity, leaf wetness sensor and calculated sensors: dew point, VPD and Delta T.

**By using proprietary intelligent sensor handling, nMETOS provides additional calculated sensor of:**

- Leaf wetness for disease forecast,
- VPD and Delta T for defining best weather for spraying (plant protection window),
- Dew point for frost prediction.

# nMETOS

## 80, 80SM



nMETOS is a new generation of a battery powered IoT data logger that operates on NB-IOT/CAT-M/GPRS networks. It can be connected to any existing NB-IoT network. nMETOS measures air temperature, relative humidity, leaf wetness and soil moisture. All the data is synchronized within FieldClimate. The line nMETOS 80 and 80SM is mainly designed for indoor applications (tunnels, greenhouses, ...).



## TECHNICAL SPECIFICATIONS

<b>Housing</b>	UV resistant polycarbonate plastic (Protection class IP65)
<b>Dimensions</b>	14.8 cm L x 11.8 cm W x 9.3 cm H
<b>Weight</b>	0.25 kg
<b>NB-IOT/CAT-M/GPRS:</b>	
<b>Connectivity</b>	Category: Cat-M1/NB1 Frequency Band: B1, B2, B3, B4, B5, B8, B9, B10, B12, B13, B14, B17, B18, B19, B20, B25, B26, B27, B28, B66
<b>Power supply</b>	3.6V primary battery cell
<b>Measuring interval</b>	15 minutes
<b>Logging interval</b>	15 minutes
<b>Communication interval</b>	60 minutes
<b>SENSORS</b>	
<b>Air Temperature</b>	<b>Operating temperature range:</b> -40 °C to +125 °C <b>Thermometer error -10 °C to +85 °C:</b> +/- 0.3 °C
<b>Relative humidity</b>	<b>Precision 0 - 80 %:</b> +/- 2 %; <b>Precision 80 - 100 %:</b> +/- 3 %

Order number:  
700216 (HL7800)  
700217 (HL7802)



Order number:  
700218 (HL7800)  
700219 (HL7802)



### nMETOS 80

Air temperature, air humidity and calculated sensors: dew point, VPD and Delta T.

### nMETOS 80SM

Air temperature, air humidity, soil moisture and calculated sensors: dew point, VPD and Delta T.



**By using proprietary intelligent sensor handling, nMETOS provides additional calculated sensors of:**

- VPD and Delta T for defining best weather for spraying (plant protection window),
- Dew point for frost prediction.



# nMETOS Use

## THIS IS WHAT YOU CAN DO:

- Plan the work week based on a localized weather forecast for your operations
- Plan your work day based on the actual rain, temperature data and the daily weather forecast for your field
- Plan your spray program based on disease models and check the quality of spray work online
- Plan your irrigation based on ET-crop and predicted plant water use
- Pass data directly into your management software and Operations Center via automatic interface

Precipitation shown  
in FieldClimate



24-hour rain map




7-day rain map

# nMETOS Motherboards

nMETOS NB-IoT gen 3 (29-0404)



front

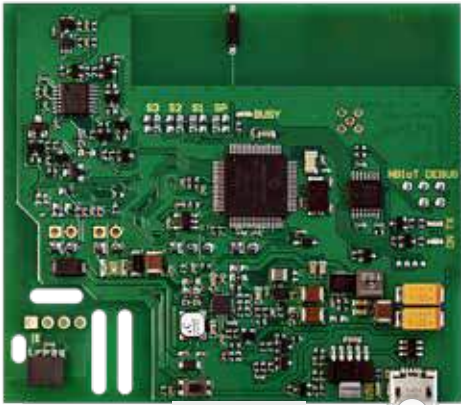

back

- 1 NB-IoT module      2 Antenna      3 SIM card holder      4 USB micro B

## **FAMILY NAME: $\mu$ METOS NB-IoT**

Monitor environmental parameters (rainfall, air temperature and humidity, frost, leaf wetness, solar radiation and wind speed), soil characteristics (soil moisture and soil temperature), as well as water level, water EC and pH.

### **BEST USED FOR:**

- Soil moisture monitoring and irrigation management
- Improving plant protection with disease models
- Frost monitoring & alarms

### **APPLICATIONS:**

Agriculture (crop growing), golf courses, parks, smart cities.

### **FAMILY MEMBERS: $\mu$ METOS NB-IoT variations**



# µMETOS NB-IoT



µMETOS NB-IoT is a LPWAN weather station that supports LTE-M (LTE Cat M1) and NB-IoT (LTE Cat NB1) mobile network connectivity, designed to monitor climate parameters (rain and temperature), soil characteristics (soil moisture, soil temperature and electrical conductivity), water pressure, multisensor sdi12 probes etc. Providing everything what the standard user needs with possibility for further expansion. Low cost, low power consumption, long range connectivity.



Data is consistently measured in 15-minute intervals and sent every 60 minutes to the server - and this can be changed to fit the specific monitoring needs. For mitigating mobile network connectivity issues, the station stores data of last few days internally and resends the measured values to the cloud when the mobile network is back online. All the data is synchronized and stored on FieldClimate platform, integrated with all additional services from PI and available for further integrations via PI API. It supports an external antenna option and it has a build in GPS sensor.

## TECHNICAL SPECIFICATIONS

<b>Housing</b>	UV resistant polycarbonate plastic (Protection class IP65)
<b>Dimensions</b>	30 cm L x 16 cm W x 19 cm H
<b>Weight</b>	1.6 kg
<b>Connectivity</b>	<b>NB-IoT/CatM1:</b> Category: Cat-M1/NB1 Frequency Band: B1, B2, B3, B4, B5, B8, B9, B10, B12, B13, B14, B17, B18, B19, B20, B25, B26, B27, B28, B66
<b>Battery</b>	6V charging battery with solar panel
<b>Solar panel</b>	Dimensions: 13.5 x 13.5 cm, 2 Watt solar panel
<b>Measuring interval</b>	15 minutes
<b>Logging interval</b>	15 minutes
<b>Communication interval</b>	60 minutes

# Product Variations

## μMETOS BASE

A basic μMETOS NB-IoT station with no physical sensors.

*Order number: 700035*

## μMETOS FROST

Wet & Dry bulb temperature.

*Order number: 700036*

## μMETOS DISEASE

Rain gauge, air temperature, air humidity and leaf wetness.

*Order number: 700037*

## μMETOS ET<sub>0</sub>

Rain gauge, air temperature, air humidity, global radiation, wind speed.

*Order number: 700039*


## μMETOS ET<sub>0</sub> DISEASE

Rain gauge, air temperature and humidity, leaf wetness, global radiation, wind speed and direction ultrasonic.

*Order number: 700041*

\*Optional: you can add soil temperature sensors (Aquacheck, Sentek, Watermark, PI54-D). Note that there are limitations how many sensors can be connected. For more details contact your local METOS® branch or your dealer.

# μMETOS NB-IoT Motherboard

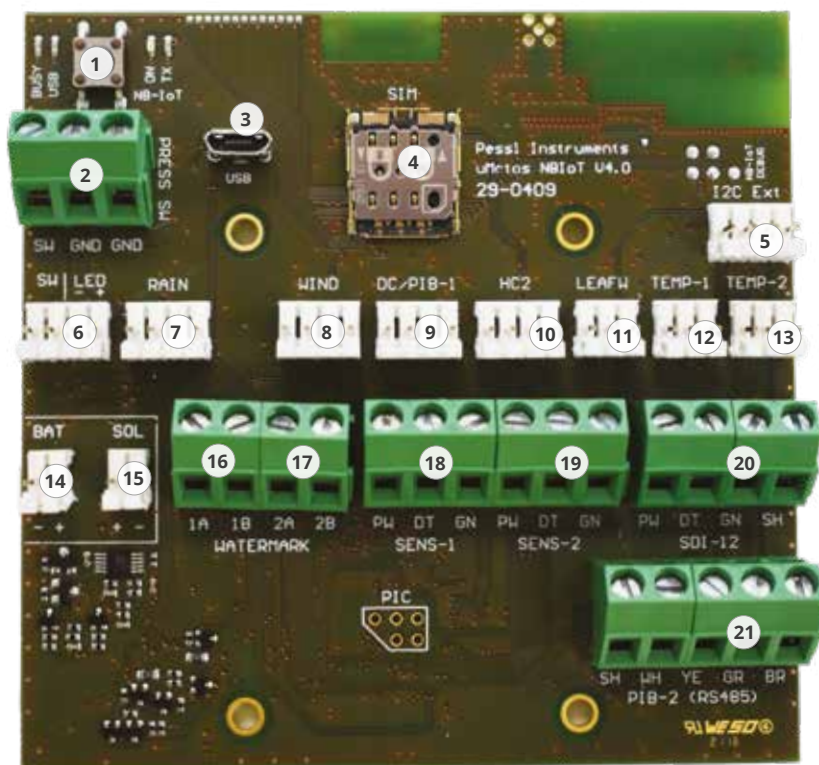

Gen. 4

- |                                      |   |                          |
|--------------------------------------|---|--------------------------|
| 1. Internal connectivity test button | 9. DC (Duty cycle) for Pyranometer or PI-Bus input      | 16. Watermark input      |
| 2. Pressure switch input             | 10. HC2 sensor input                                    | 17. Watermark input      |
| 3. USB port                          | 11. Leaf Wetness input                                  | 18. PI-Bus input         |
| 4. SIM card slot                     | 12. Temp-1 (DS18B20) - dedicated soil temperature input | 19. PI-Bus input         |
| 5. I2C input                         | 13. Temp-2 (DS18B20) - dedicated air temperature input  | 20. SDI12 input          |
| 6. External button with status LED   | 14. 6V Battery connector                                | 21. General PI-Bus input |
| 7. Rain gauge or Water meter input   | 15. Solar panel connector                               |                          |
| 8. Anemometer or Counter input       |   |                          |

## **FAMILY NAME: $\mu$ METOS SOIL LoRa**

Monitor basic climate parameters (rain and temperature), soil characteristics (soil moisture, soil temperature and electrical conductivity), as well as water pressure.

### **BEST USED FOR:**

- Soil moisture monitoring and irrigation management
- Improving plant protection with disease models
- Water level monitoring

### **APPLICATIONS:**

Agriculture (crop growing), golf courses, parks, smart cities.

### **FAMILY MEMBERS: $\mu$ METOS SOIL LoRa variations**



# μMETOS SOIL LoRa



μMETOS SOIL LoRa is a LPWAN weather station that operates on LoRaWAN® network. It is designed to monitor basic climate parameters (rain and temperature), soil characteristics (soil moisture, soil temperature and electrical conductivity), as well as water pressure. Data is consistently measured in 5-minute intervals and sent every 15 minutes to the server. All the data is synchronized within FieldClimate.



MEMBER OF  
**LoRa Alliance**

## TECHNICAL SPECIFICATIONS

<b>Housing</b>	UV resistant polycarbonate plastic (Protection class IP65)
<b>Dimensions</b>	30 cm L x 16 cm W x 19 cm H
<b>Weight</b>	1.6 kg
<b>Connectivity</b>	<b>LoRaWAN™:</b> EU863-870, RU864-870, US902-928, AU915-928 and AS920-925
<b>Battery</b>	6V charging battery with solar panel
<b>Solar panel</b>	Dimensions: 13.5 x 13.5 cm, 2 Watt solar panel
<b>Measuring interval</b>	5 minutes
<b>Logging and transmission interval</b>	15 minutes

# Product Variations

## µMETOS SOIL BASE LoRa

A basic µMETOS SOIL LoRa station with no physical sensors.

*Order number:*

700106 (EU 863-870)

700107 (US 902-928)

700108 (AU 915-928)

700109 (RU 864-870)

700110 (AS 920-925)

## µMETOS SOIL RAIN LoRa

Rain gauge and soil temperature.

*Order number:*

700111 (EU 863-870)

700112 (US 902-928)

700113 (AU 915-928)

700114 (RU 864-870)

700115 (AS 920-925)

## OPTIONAL SENSORS\*

---

Pessl Instruments PI 54-A and PI 54-D Sensor

---

Watermark Sensor

---

Sentek D&D Profile Sensor Probe (10 / 30 / 60 / 90 / 120 cm)

---

Sentek D&D Triscan Profile Sensor Probe (10 / 30 / 60 / 90 / 120 cm)

---

Aquacheck Sub-Surface Probe (60 / 80 / 120 cm)

---

Pessl Instruments EC Sensor Module

---

Pessl Instruments pH Sensor Module

---

Pressure Switch 1 Bar

---

Flow Meter Internal Interface Directly Connectable to Rain Sensor Input


---

Water level

---

\* The number of connected sensors to a single station is limited. For specific sensor set consult with your dealer.

# μMETOS SOIL LoRa Motherboard

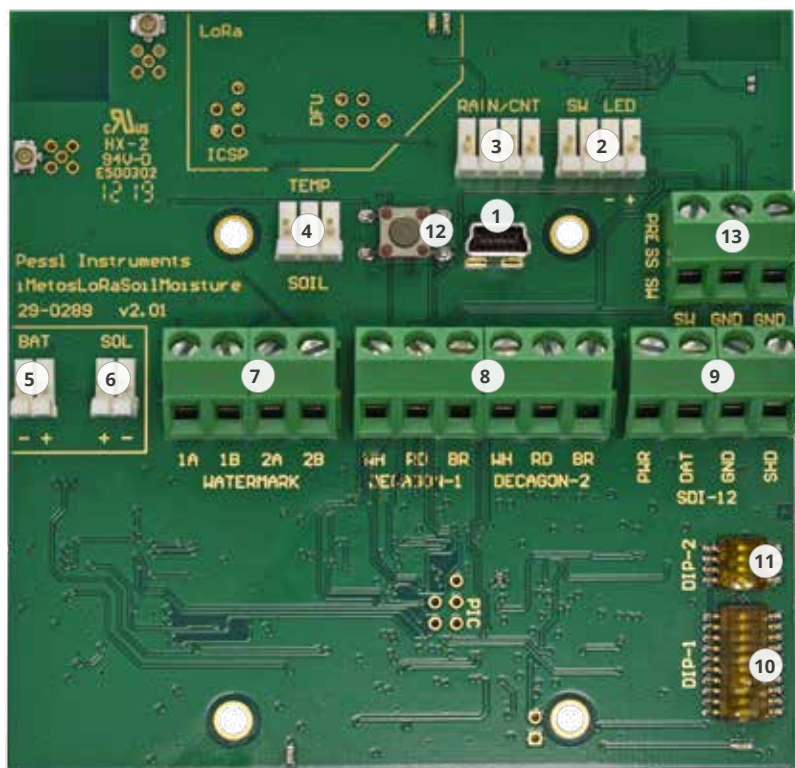

Gen. 2 (29-0289)

1. USB mini A
2. External communication button with blue LED
3. Rain gauge
4. Soil temperature
5. Battery
6. Solar panel
7. Connector for 2 Watermark sensors
8. Connector for 2 PI54-D sensors
9. SDI12 input
10. DIP-1
11. DIP-2
12. Connect button
13. Pressure switch input

## **FAMILY NAME: $\mu$ METOS CLIMA LoRa**

Monitor environmental parameters (rainfall, air temperature and humidity, frost, leaf wetness, solar radiation and wind speed), soil characteristics (soil moisture and soil temperature), as well as water level, water EC and pH.

### **BEST USED FOR:**

- Soil moisture monitoring and irrigation management
- Improving plant protection with disease models
- Frost monitoring & alarms

### **APPLICATIONS:**

Agriculture (crop growing, animal production), golf courses, parks, smart cities, hydrology

### **FAMILY MEMBERS: $\mu$ METOS CLIMA LoRa variations**



# µMETOS CLIMA LoRa



µMETOS CLIMA is a LPWAN weather station that operates on LoRaWAN® network.

It is designed to monitor basic climate parameters (rain and temperature, humidity, frost, leaf wetness, solar radiation, wind speed), soil characteristics (soil moisture and soil temperature), as well as water level, water EC and pH. Data is permanently measured in 5-minute intervals and sent every 15 minutes to the server. All the data is synchronized with FieldClimate.



## TECHNICAL SPECIFICATIONS

Housing	UV resistant polycarbonate plastic (Protection class IP65)
Dimensions	30 cm L x 16 cm W x 19 cm H
Weight	1.6 kg
Connectivity	LoRaWAN™: EU863-870, RU864-870, US902-928, AU915-928 and AS920-925
Battery	6V charging battery with solar panel
Solar panel	Dimensions: 13.5 x 13.5 cm, 2 Watt solar panel
Measuring interval	5 minutes
Logging and transmission interval	15 minutes

# Product Variations

## μMETOS CLIMA BASE

A basic μMETOS CLIMA LoRa station with no physical sensors.

*Order number:*

700051 (EU 863-870)	700054 (RU 864-870)
700052 (US 902-928)	700055 (AS 920-925)
700053 (AU 915-928)	

## μMETOS CLIMA FROST

Wet & Dry bulb temperature.

*Order number:*

700056 (EU 863-870)	700059 (RU 864-870)
700057 (US 902-928)	700060 (AS 920-925)
700058 (AU 915-928)	

## μMETOS CLIMA DISEASE

Rain gauge, air temperature, air humidity and leaf wetness.

*Order number:*

700061 (EU 863-870)	700064 (RU 864-870)
700062 (US 902-928)	700065 (AS 920-925)
700063 (AU 915-928)	

## μMETOS CLIMA ET<sub>0</sub>

Rain gauge, air temperature, air humidity, global radiation, wind speed.

*Order number:*

700071 (EU 863-870)	700074 (RU 864-870)
700072 (US 902-928)	700075 (AS 920-925)
700073 (AU 915-928)	


## μMETOS CLIMA ET<sub>0</sub> DISEASE

Rain gauge, air temperature and humidity, leaf wetness, global radiation, ultrasonic wind speed and wind direction.

*Order number:*

700081 (EU 863-870)	700084 (RU 864-870)
700082 (US 902-928)	700085 (AS 920-925)
700083 (AU 915-928)	

# μMETOS CLIMA LoRa Motherboard

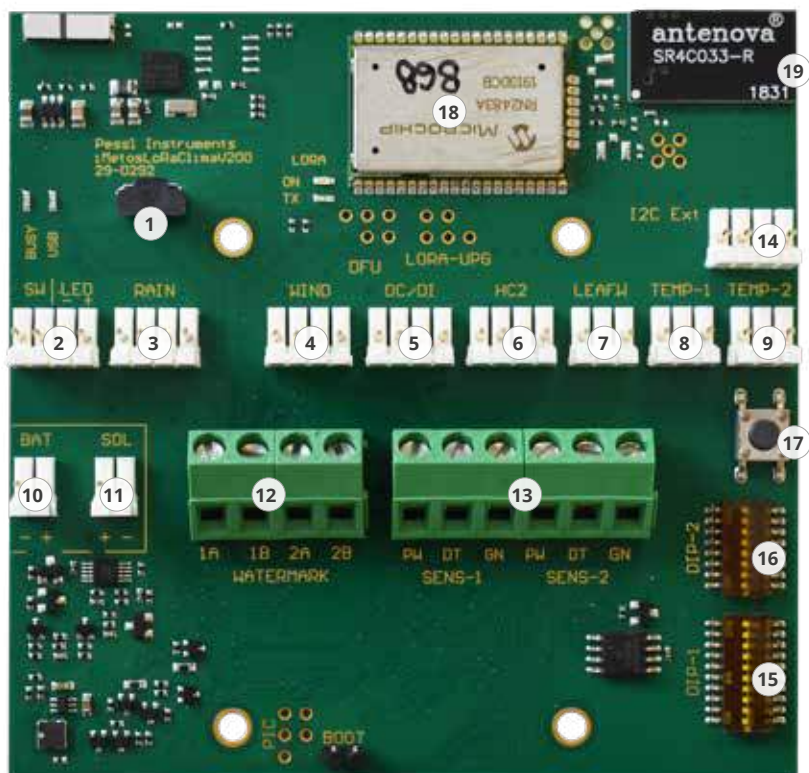

Gen. 1

- |  |                                       |                               |
|--|---------------------------------------|-------------------------------|
| 1. USB micro B                                 | 7. Leaf wetness or pressure switch    | 14. I2C External connector    |
| 2. External communication button with blue LED | 8. Extra temperature input            | 15. DIP-1                     |
| 3. Rain gauge                                  | 9. Extra temperature input            | 16. DIP-2                     |
| 4. Wind speed                                  | 10. Battery                           | 17. Connect button            |
| 5. Duty cycle sensor or digital input          | 11. Solar panel                       | 18. LoRaWAN™ module           |
| 6. Temperature & relative humidity (Hygroclip) | 12. Connector for 2 Watermark sensors | 19. On-board LoRaWAN™ antenna |
|  | 13. Connector for 2 PI54-D sensors    |                               |

## **FAMILY NAME: Weather stations that operate on LoRa™ network**

Compact, cost effective, small, quick to install, and designed for large-scale deployment everywhere intelligent IOTs are needed.

### **BEST USED FOR:**

- Field operations planning (workforce allocation, spray and irrigation planning)
- Improving plant protection with disease models
- Reducing the risk for animal health problems

### **APPLICATIONS:**

Agriculture (crop growing, animal production), golf courses, parks, smart cities, indoor monitoring, Country-wide Rainfall Networks.

### **FAMILY MEMBERS: LoRATH & LoRAIN**

# LoRATH



LoRATH is a new generation of a battery powered IoT data logger that operates on LoRAWAN network. It can be connected to any existing LoRAWAN® network. LoRATH measures air temperature, relative humidity, leaf wetness and soil moisture. All the data is synchronized within FieldClimate. The unit is prepared to be mounted inside (tunnels, greenhouses, indoor applications) or outside in open fields (IP65).



## TECHNICAL SPECIFICATIONS

<b>Housing</b>	UV resistant polycarbonate plastic (Protection class IP65)
<b>Dimensions</b>	14.8 cm L x 11.8 cm W x 9.3 cm H
<b>Weight</b>	0.25 kg
<b>LoRaWAN™</b>	
<b>Connectivity</b>	EU863-870, RU864-870, US902-928, AU915-928 and AS920-925
<b>Power supply</b>	Super capacitor charged with the solar pane
<b>Measuring interval</b>	5 minutes
<b>Logging interval</b>	15 minutes
<b>Communication interval</b>	15 minutes
<b>SENSORS</b>	
<b>Air Temperature</b>	<b>Operating temperature range:</b> -40 °C to +125 °C <b>Thermometer error -10 °C to +85 °C:</b> +/- 0.3 °C
<b>Relative humidity</b>	<b>Precision 0 - 80 %:</b> +/- 2 %; <b>Precision 80 - 100 %:</b> +/- 3 %



# LoRATH - LoRa connectivity

*Order number:*

700021 (EU 863-870)  
700022 (US 902-928)  
700023 (AU 915-928)  
700024 (RU 864-870)  
700025 (AS 920-925))

*Order number:*

700026 (EU 863-870)  
700027 (US 902-928)  
700028 (AU 915-928)  
700029 (RU 864-870)  
700030 (AS 920-925)



## LoRATH

Air temperature, air humidity and calculated sensors: dew point, VPD and Delta T.

## LoRATH SOIL

Air temperature, air humidity, soil moisture and calculated sensors: dew point, VPD and Delta T.

**By using the proprietary intelligent sensor handling, LoRATH provides additional calculated sensor values of:**

- VPD and Delta T for defining best weather for spraying (plant protection window),
- Dew point for frost prediction.



# LoRAIN



LoRAIN is a new generations of weather stations that operate on LoRaWAN® network. LoRAIN devices measures rainfall, air and soil temperature, relative humidity, leaf wetness, and soil moisture. All the data is synchronized within FieldClimate.



## TECHNICAL SPECIFICATIONS

<b>Housing</b>	UV resistant polycarbonate plastic (Protection class IP65)
<b>Dimensions</b>	22.5 cm L x 17 cm W x 18 cm H
<b>Weight</b>	1,10 kg
<b>LoRaWAN™</b>	
<b>Connectivity</b>	EU863-870, RU864-870, US902-928, AU915-928 and AS920-925
<b>Power supply</b>	Super capacitor charged with the solar panel
<b>Measuring interval</b>	5 minutes
<b>Logging interval</b>	15 minutes
<b>Communication interval</b>	15 minutes
<b>SENSORS</b>	
<b>Rain Gauge</b>	<b>Sensitivity:</b> 1 tip per 0.2 mm
<b>Air Temperature</b>	<b>Operating temperature range:</b> -40 °C to +125 °C <b>Thermometer error -10 °C to +85 °C:</b> +/- 0.3 °C
<b>Relative humidity</b>	<b>Precision 0 - 80 %:</b> +/- 2 %; <b>Precision 80 - 100 %:</b> +/- 3 %

LoRAIN works on LoRAWAN® network. Keep in mind that the NB-IoT and LoRAWAN options are not interchangeable.

**Order number:**  
 700000 (EU 863-870)  
 700001 (US 902-928)  
 700002 (AU 915-928)  
 700003 (RU 864-870)  
 700004 (AS 920-925)

**Order number:**  
 700005 (EU 863-870)  
 700006 (US 902-928)  
 700007 (AU 915-928)  
 700008 (RU 864-870)  
 700009 (AS 920-925)

**Order number:**  
 700010 (EU 863-870)  
 700011 (US 902-928)  
 700012 (AU 915-928)  
 700013 (RU 864-870)  
 700014 (AS 920-925)

**Order number:**  
 700235 (EU 863-870)  
 700236 (US 902-928)  
 700237 (AU 915-928)  
 700238 (RU 864-870)  
 700239 (AS 920-925)



## LoRAIN Rain only

Rain gauge.



## LoRAIN TRH

Rain gauge, air temperature, air humidity and calculated sensors: leaf wetness, dew point, VPD and Delta T.



## LoRAIN SOIL

Rain gauge, air temperature, air humidity, soil moisture and calculated sensors: leaf wetness, dew point, VPD and Delta T.



## LoRAIN DISEASE

Rain gauge, air temperature, air humidity, leaf wetness sensor and calculated sensors: leaf wetness, dew point, VPD and Delta T.

**By using the proprietary intelligent sensor handling, LoRAIN provides additional calculated sensor values of:**

- Leaf wetness for disease forecast,
- VPD and Delta T for defining best weather for spraying (plant protection window),
- Dew point for frost prediction.

# LoRATH & LoRAIN Use

## THIS IS WHAT YOU CAN DO:

- Plan the work week based on a localized weather forecast for your operations
- Plan your work day based on the actual rain, temperature data and the daily weather forecast for your field
- Plan your spray program based on disease models and check the quality of spray work online
- Plan your irrigation based on ET-crop and predicted plant water use
- Pass data directly into your management software and Operations Center via automatic interface



Precipitation shown  
in FieldClimate



24-hour rain map




7-day rain map




# LoRATH & LoRAIN Motherboards

LoRAIN and LoRATH LoRa gen 3 (29-0406)

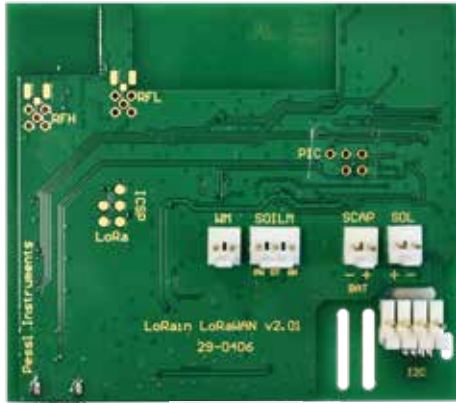

front

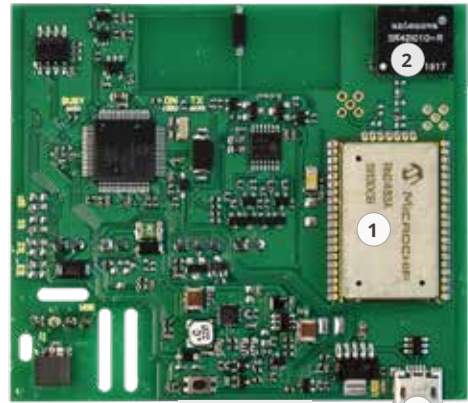

back

- 1 LoRaWAN™ module    2 Antenna    3 USB micro B

## **FAMILY NAME: iMETOS 3.3**

A powerful, durable and flexible data logger for all climatic and meteorological conditions. They offer a complete solution for environmental monitoring, disease models, water management and more. Versatile, with the possibility to configure and connect many different sensors - over 600 sensors to choose from.

### **BEST USED FOR:**

- Improving plant protection with disease models
- Soil moisture monitoring and irrigation management
- Frost monitoring and alarms

### **APPLICATIONS:**

Agriculture (crop growing, animal production), golf courses, parks, smart city, research, meteorology, hydrology

### **FAMILY MEMBERS:** IMT variations

# iMETOS 3.3



A powerful, durable and flexible data logger for all climatic and meteorological conditions. They offer a complete solution for environmental monitoring, disease models, water management and more. Versatile, with the possibility to configure and connect many different sensors – over 600 sensors to choose from.

Additionally, you can connect Pessl Instruments proprietary radio network (*for technical information see page 60*) and up to 16 wireless sensor nodes within a farm, research block, golf course, park, ...



## TECHNICAL SPECIFICATIONS

<b>Sensors layout</b>	1 wind speed, 1 leaf wetness, 1 rain gauge, 1 water-meter (reed), 2 hygroclics (air temperature and relative humidity) <b>5 digital inputs:</b> automatic sensor recognition, supporting sensor chains (max. 600 sensors)
<b>Extension connector</b>	Radio access point or Sentek Drill & Drop or ultrasonic wind sensor or two extra chain connectors – Pessl Instruments bus cable nodes
<b>Memory</b>	8 MB flash memory
<b>Internet connectivity</b>	2G, 3G, 4G (LTE class 1, LTE class M)
<b>Alert</b>	SMS, user configurable via website
<b>Dimensions without sensors</b>	41 cm L x 13 cm W x 7 cm H
<b>Weight without sensors</b>	2.2 kg
<b>Measuring interval</b>	5 minutes (by default)
<b>Logging interval</b>	10-120 minutes (user selectable)
<b>Transmission frequency</b>	User selectable
<b>Battery</b>	6V, 4.5AH, Operating range: -35 °C to 80 °C
<b>Solar panel</b>	Dimensions: 13.5 x 13.5 cm, 2 Watt solar panel
iMETOS 3.3 base unit (no sensors included), internet based logger, battery 4.5Ah, solar panel, UMTS based, logger, mounting brackets	

# Main Sensor Variations



## iMETOS IMT200

Air Temperature and Relative Humidity sensor, Rain Gauge, Leaf Wetness sensor and Sensors for Disease models.

*Order number:*

700135 (EU LTE HL7692)

700136 (CA LTE HL7688)

700137 (US LTE HL7618RD)

700138 (HL8548)

700139 (HL7802)



## iMETOS IMT280-USW

Rain Gauge and all the sensors for Evapotranspiration calculation: Air Temperature and Relative Humidity, Global Radiation and Ultrasonic Wind.

*Order number:*

700145 (EU LTE HL7692)

700146 (CA LTE HL7688)

700147 (US LTE HL7618RD)

700148 (HL8548)

700149 (HL7802)



## iMETOS IMT300-USW

Sensors for Evapotranspiration and Disease Models calculation: Air Temperature and Relative Humidity, Rain Gauge, Global Radiation, Ultrasonic Wind and Leaf Wetness.

*Order number:*

700155 (EU LTE HL7692)

700156 (CA LTE HL7688)

700157 (US LTE HL7618RD)

700158 (HL8548)

700159 (HL7802)



# iMETOS RadioNode Interface


iMETOS RadioNode is a small, wireless, battery powered datalogger for in-field measurement of soil moisture, temperatures, rain, flow rate, leaf wetness, relative humidity and other parameters. iMETOS RadioNode sends all sensor readings in real time through an interactive star topology network back to our base station. From the base station, the data is uploaded to the web via cellular network (GPRS, UMTS, WiFi). All data is available within the FieldClimate platform. To connect iMETOS RadioNode to the iMETOS 3.3, RF Access Point is needed.

## TECHNICAL SPECIFICATIONS

<b>Housing</b>	UV resistant polycarbonate plastic (Protection class IP67)
<b>Dimensions without sensors</b>	30 cm L x 16 cm W x 19 cm H
<b>Weight without sensors</b>	1.6 kg
<b>Model/Type</b>	Texas Instruments RF CC1120 module with integrated ultra low power sub-GHz; transceiver module; integrated crystal, internal voltage regulator, built in antenna global; using free ISM bands, ISM Band 915 MHz: USA, Canada, Australia, Israel etc.; ISM Band 868 MHz: Europe; ISM Band 433 MHz: Asia
<b>Expected range</b>	300 to 400 meter (1200 to 1400 ft.) at +10 dBm, broad line of sight, when mounted on level ground at least 3 m (10 ft.) high and above crops, grass, bushes or foliage


## CONNECTION TO MOTHERBOARDS

iMETOS 3.3/μMETOS NB-IoT/μMETOS CLIMA LoRA / μMETOS SOIL



**Internal wireless access point** allows you to connect up to 16 RadioNodes to the main station.

# Remote Sensor Node Variations

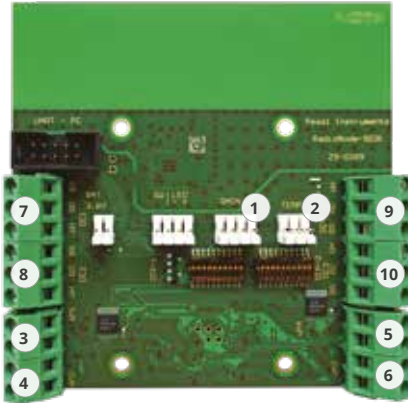

## SD31 iMETOS RadioNode Watermark/ METER with inputs for:

1. Rain gauge 0.2 mm (0.01 inch) / Water meter
2. Temperature sensor (WMTEMP)
- 3.-6. Watermark sensor
- 7.-10. PI54-D


**Power Supply:** One 3.6V Li-Ion primary cell with 19.000mAh (7 years operation)

## SD51 iMETOS RadioNode Drill & Drop


with inputs for:

1. Rain gauge 0.2 mm (0.01 inch) / Water meter
2. Sentek Drill & Drop probe
- 3.-4. Watermark sensor
- 5.-6. PI54-D
7. Solar panel
8. 6V, 4.5Ah battery connector
9. External antenna

**Power Supply:** Solar panel and 6V Pb 4.5Ah battery

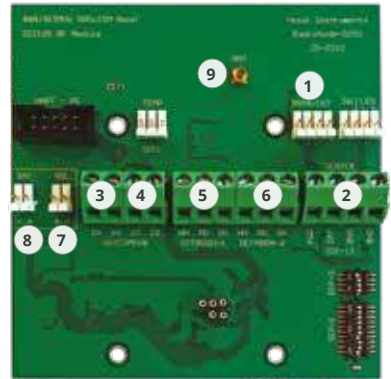

# iMETOS 3.3 Motherboard

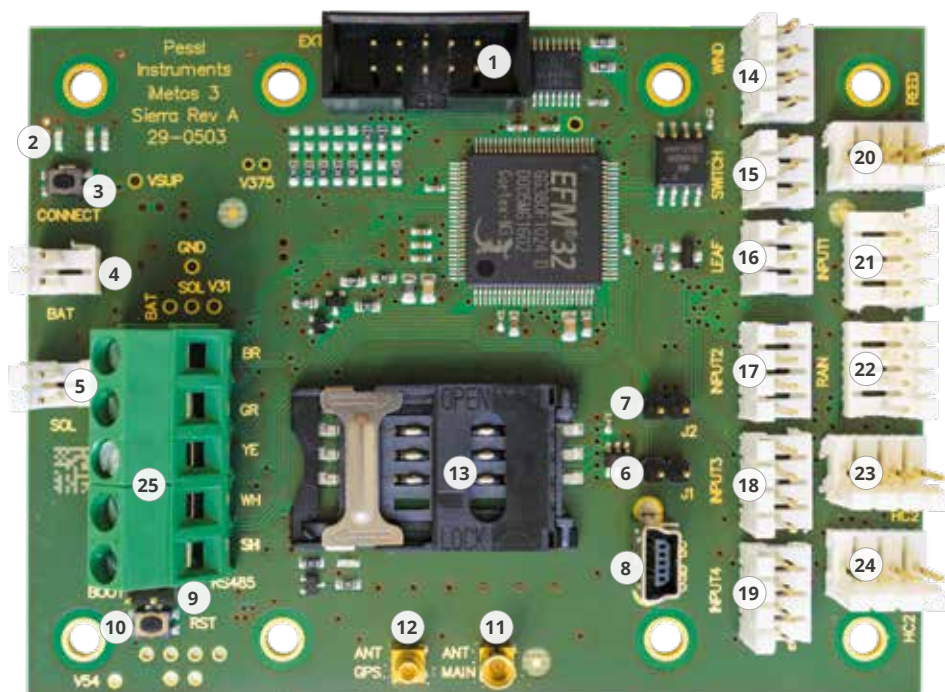

- |                                    |                     |  |
|------------------------------------|---------------------|--|
| 1. Extension board<br>(Radio node) | 10. Reset button    | 20. Reed   |
| 2. LED indicators                  | 11. GSM antenna     | 21. Input 1  |
| 3. Connect button                  | 12. GPS antenna     | 22. Rain gauge                                     |
| 4. Battery                         | 13. SIM card holder | 23. Temperature & relative<br>humidity (Hygroclip) |
| 5. Solar panel                     | 14. Wind speed      | 24. Temperature & relative<br>humidity (Hygroclip) |
| 6. Jumper J1                       | 15. Switch          | 25. Dedicated chain input                          |
| 7. Jumper J2                       | 16. Leaf wetness    |  |
| 8. USB                             | 17. Input 2         |  |
| 9. Boot jumper                     | 18. Input 3         |  |
|                                    | 19. Input 4         |  |

# Chain Node Interface for 3 Pessl Instruments Sensors

*Order number: 600069 / 900052 / 900173*

This Interface enables the connection of up to 3 PI54-D sensors to a METOS® weather station. The Interface can be an External box for iMETOS 3.3 (ECH870EXT).




## YOU CAN CONNECT:

### The following Pessl Instruments sensors:

- Vacuum Tensiometer
- Water Level Sensor
- Pipe Water Pressure Sensor
- PI54-D

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



# Chain Node Interface for 2 Pessl Instruments Sensors & 2 Watermark Sensors & 1 Soil Temperature Sensor

Order number: 600068 / 900051 / 900174

This Interface enables the connection of up to 5 soil sensors to a METOS® weather station. It is possible to connect 2 PI54-D sensors, 2 Watermark sensors and 1 soil temperature sensor.

The Interface can be an External box for iMETOS 3.3 (ECH871EXT).



## YOU CAN CONNECT:

### Two pieces of the following sensor:

- Watermark sensor

### One piece of the following sensor:


- Soil Temperature (WMTEMP)

### Two pieces of the following Pessl Instruments sensors:

- Vacuum Tensiometer
- Water Level Sensor
- Pipe Water Pressure Sensor
- PI54-D

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3





# Chain Node Interface for 1 Pessl Instruments Sensor & 4 Watermark Sensors & 1 Soil Temperature Sensor

Order number: 600167 / 900057 / 900175

This Interface enables the connection of up to 6 soil sensors to a METOS® weather station. It is possible to connect 1 PI54-D sensor, 4 Watermark sensors and 1 soil temperature sensor.

The Interface can be an External box for iMETOS 3.3 (ECH874EXT).



## YOU CAN CONNECT:

### Four pieces of the following sensor:

- Watermark sensor

### One piece of the following sensor:


- Single Soil Temperature

### One piece of the following Pessl Instruments sensors:

- Vacuum Tensiometer
- Water Level Sensor
- Pipe Water Pressure Sensor
- PI54-D

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



# SDI12 Chain Node Interfaces with 2 iMETOS AC/Sentek Connectors


Order number: 600150 / 900105

These Interfaces enable the connection of up to 2 iMETOS AC or 2 Drill & Drop probes. The Interface can be an External box for iMETOS 3.3 (SDI12\_Chain).

## YOU CAN CONNECT:

**Two pieces of the following probe:**

- iMETOS AC different types
- Sentek Drill & Drop different types

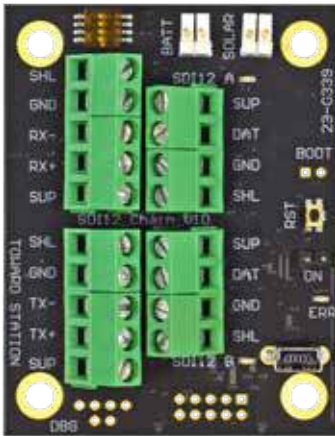


**SDI12\_Chain**  
External Chain Interface



**SDI12\_X2 Internal Interface**  
for 2 Soil Moisture Probes

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



**SDI12\_X2**  
**SDI12\_Chain**

## **FAMILY NAME: iMETOS ICA10 NB-IoT**

A smart system which uses the data from a pressure switch to monitor and to operate irrigation systems.

### **BEST USED FOR:**

- Optimisation of irrigation cycles
- Optimisation of fertigation cycles
- Monitoring and operating the irrigation system

### **APPLICATIONS:**

Agriculture (crop growing), hydrology

### **FAMILY MEMBERS: iMETOS ICA10 NB-IoT**

# iMETOS ICA10 NB-IoT



iMETOS ICA10 NB-IoT is a smart system which uses the data from a flow sensor switch to monitor and operate irrigation system.

With the help of partner platform Spherag, sensors for soil moisture, temperature, relative humidity, wind, rain, water counter, pressure transducers etc. can be used to automatically switch on and off the solenoids. iMETOS ICA10 NB-IoT works with most common solenoids from Baccara, TORO, Rainbird, Netafim etc. to make irrigation/fertigation cycles more intelligent, based on real-time data and real plant requirements.



## TECHNICAL SPECIFICATIONS

<b>Sensors Layout</b>	Automatic ON/OFF switch, Pressure detector
<b>Memory</b>	Microprocessor
<b>Internet connectivity</b>	NB-IoT
<b>Alert</b>	Notification, user configurable via website Remotely operated
<b>Weight without sensors</b>	246.5 g
<b>Measuring interval</b>	Real time
<b>Logging interval</b>	Real time
<b>Internet contact</b>	Real time
<b>Battery</b>	3,7V, 3AH, Operating range: -15° C to 60° C
<b>Solar panel</b>	Dimensions: 45 x 70 cm, 0,4 Watt solar panel
<b>Outputs</b>	1 bi-directional Latch valves (DC) . Outcome 14V

Order number: 100424



*iMETOS ICA10 NB-IoT applications*



*Data in Spherag platform*



## **FAMILY NAME: Camera products**

A remote monitoring system that provides time-lap images that monitors insect pressure (iSCOUT®) and growth of your crops for stage of development, germination, disease issues and size of fruit (CropVIEW®).

### **BEST USED FOR:**

- Preventing damage on crops and fields
- Reducing the use of pesticides or insecticides
- Early detection of diseases & insect pressure
- Yield forecast of fruit crops through AI on following crop growth


### **APPLICATIONS:**

Agriculture (crop growing, animal production), golf courses, parks, smart city, research

**FAMILY MEMBERS:** iSCOUT variations & CropVIEW variations

# iSCOUT® - AI-Based Insect Scouting

iSCOUT® is a combination of hardware and software solutions for remote monitoring of different pest insects. The iSCOUT® is an insect trap with integrated electronics and a sticky plate. Due to its low weight, it can be hung anywhere in the field. The device is self-sufficient, as it is powered by a solar panel and a battery. 10 MP camera takes high-resolution pictures of the sticky plate within the iSCOUT® trap. Images are sent via LTE communications to an online platform where they are analyzed and counted by automatic pest detection framework, using AI and self-learning algorithms. All data from camera system and AI software is displayed online, within the FieldClimate platform. Two camera devices (iSCOUT® or CropVIEW®) can be connected on one control unit. Every power unit can also connect the following environmental sensors: rain, temperature and relative humidity (Hygroclip) and leaf wetness.

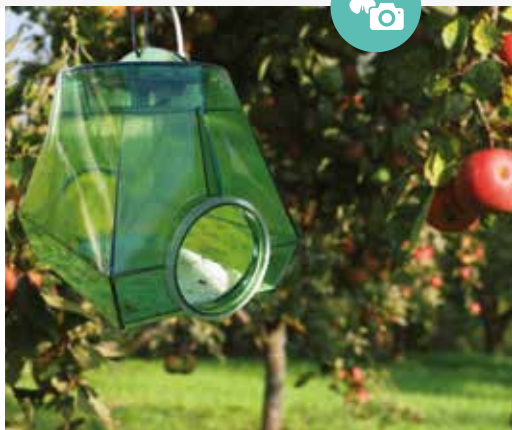

*iSCOUT® Bug*



*iSCOUT® uses automatic recognition algorithm for recognizing pests.*



*iSCOUT® Color Trap*

## TECHNICAL SPECIFICATIONS

<b>Memory</b>	1 GB
<b>Internet connectivity</b>	LTE class 1
<b>GPS receiver</b>	Yes
<b>Dimensions of trap housing without control unit</b>	20 cm L x 15.5 cm W x 17 cm H
<b>Weight without control unit</b>	0.93 kg
<b>Transmission interval</b>	Max. 3 times per day (usually once per day)
<b>Battery type</b>	Rechargeable Lead acid battery 6V, 12 Ah
<b>Solar panel dimensions</b>	17.5 x 17.5 cm, 7.2 Volt, 333 mA
<b>Camera</b>	10 megapixel camera
Internet based monitoring device, solar panel, rechargeable battery, GPRS Logger, GPS sensor	

**Camera Control unit base** with interface for up to 2 camera devices with opportunity to connect environmental sensors (not included). Following sensors can be connected: Rain gauge, temperature, relative humidity and leaf wetness.



*Control Unit Board*



# iSCOUT® Variations

## iSCOUT® PHEROMONE

Designed and developed to catch insects with insect specific pheromone lure (**codling moth, european grape berry moth, tomato leafminer and many other species**). It includes a metal plate on which sticky paper and a pheromone lure can be applied.

*Order number:*

700160 (EU LTE HL7692)

700161 (CA LTE HL7688)

700162 (US LTE HL7618RD)

700163 (HL8548)



## iSCOUT® BUG

Designed and developed to catch bugs (**marmorated stink bug and others**). It includes a metal bottom plate with black pyramid wings and has closed side entries. Once the bug enters the trap from the bottom, it is fixed on the plate.

*Order number:*

700164 (EU LTE HL7692)

700165 (CA LTE HL7688)

700166 (US LTE HL7618RD)

700167 (HL8548)



## iscout® FRUIT FLY

Designed and developed to catch fruit flies (**spotted wing drosophila, olive fruit fly, mediterranean fruit fly and many other species**). It includes 3 mm nettings on entries, so that bigger flies (house flies) cannot enter the trap. Tank system for lure and metal plate on which sticky paper is applied are included. To catch and monitor bigger flies, nettings can be removed.

*Order number:*

700172 (EU LTE HL7692)

700173 (CA LTE HL7688)

700174 (US LTE HL7618RD)

700175 (HL8548)



## iscout® COLOR TRAP

Designed and developed to monitor sticky traps of different colors. The device comes with high resolution camera and a holder for a sticky plate.

**Catching various insects depends on the color of the plate used:**

- blue: **frankliniella occidentalis, thrips tabaci, ...**
- yellow: **white flies, leafminers, sciarid flies, ...**
- white: **apple sawfly, plum sawfly, plum fruit sawfly, raspberry beetle, ...**



*Order number:*

700168 (EU LTE HL7692)

700169 (CA LTE HL7688)

700170 (US LTE HL7618RD)

700171 (HL8548)



# CropVIEW® - AI-Based Crop & Growth Monitoring Solution



CropVIEW® is an agricultural information system, which periodically takes high resolution photos of farmland, research plots, crop canopies, orchards etc. Photos are automatically uploaded to FieldClimate platform, thus allowing a constant crop quality and yield control. The high resolution pictures enable checking seeds for germination, monitoring the effect of fertilizers and pesticides on crop development, and help decide whether a disease or pest already threatens profitability. High-resolution images can be viewed and analyzed daily over time without any additional effort. The system operates with rechargeable battery and a solar panel all year round in most climatic zones. Two camera devices (iSCOUT® or CropVIEW®) can be connected on one control unit. Every power unit can also host the following environmental sensors: rain, temperature, and relative humidity (Hygroclip) and leaf wetness.



## TECHNICAL SPECIFICATIONS

<b>Housing</b>	Power supply and sensor support box: 41 cm L x 13 cm W x 7 cm H
<b>Weight without sensors</b>	2.2 kg
<b>Camera module</b>	Stainless steel base with IP65 box 27 cm L x 17 cm W x 9 cm H, weight: 1.5 kg
<b>Power supply</b>	6 V lead acid 12Ah battery with solar panel
<b>Model/Type</b>	Cortex M4 processor module with integrated Communication model for UMTS/LTE operation
<b>Camera and optics</b>	MT9J003 10 Mega Pixel 2/3" CMOS sensors - Optics DSL377A-650-F2.8 2/3" Lens with 2.5 mm Focal length and DSL901J-650-F3.0 2/3" Lens with 12 mm Focal Length
<b>Control Unit</b>	Camera Control Unit Base with interface for up to 2 camera device with opportunity of connect sensors (not included). Following sensors can be connected: Rain gauge, temperature, relative humidity and leaf wetness.

## CropVIEW VARIATIONS:

### CropVIEW® Panorama

One 10 MP Wide Angle Lens

*Order number:*

700176 (EU LTE HL7692)

700177 (CA LTE HL7688)

700178 (US LTE HL7618RD)

700179 (HL8548)



### CropVIEW® Tele

One 10 MP Tele Lens

*Order number:*

700180 (EU LTE HL7692)

700181 (CA LTE HL7688)

700182 (US LTE HL7618RD)

700183 (HL8548)



### CropVIEW® Dual

Two 10 MP Lenses - Wide Angle and Tele

*Order number:*

700184 (EU LTE HL7692)

700185 (CA LTE HL7688)

700186 (US LTE HL7618RD)

700187 (HL8548)



*Images, taken by CropVIEW®.*

*A tool in FieldClimate enables you to select specific fruits on pictures taken in your orchard or field by a zoom lense in CropVIEW®. If you know the precise distance between the camera and crop, you will get a reliable measurement of fruit diameter in mm.*



## APPLE ORCHARD USE CASE



*Tele lens focusing on a tree and detecting the apples automatically (CropVIEW automatic detection).*



*Marking apples by hand and following their growth during the season.*



*The minimum, maximum and average diameter (in mm) of all selected fruits is shown on a graph, and the exact values in a table (which can be downloaded as an Excel file for further analysis).*

## VITICULTURE USE CASE



*Following the growth of shoots and developing leaves.*



*Inflorescence of grapes is clearly seen on the photos.*



## SERIES OF PICTURES IN MAIZE/WHEAT USE CASE



*Germination and emergence of wheat.*



*Different BBCH stages of wheat, for example tillering stages.*



*Following the uniform emergence and growth of maize daily.*

**With CropVIEW® you receive a time lapse of your crop growth.  
Check the time lapse of maize growth here:**

[https://youtu.be/V\\_ZXBSD\\_7XQ](https://youtu.be/V_ZXBSD_7XQ)



## **FAMILY NAME: iMETOS WorkTrack**

A battery-powered versatile tracking device that is easily mounted on any asset (sprayer, mower, utility vehicles, tractors, carts, ...).

### **BEST USED FOR:**

- Detailed activity report about where, when, and how much an asset has been operational
- Optimisation and enhancement of work and workforce planning
- Knowing current position of all active machines

### **APPLICATIONS:**

Agriculture (crop growing, animal production), golf courses, parks, smart city

**FAMILY MEMBERS:** iMETOS WorkTrack, iMETOS Beacon



# iMETOS WorkTrack



With iMETOS WorkTrack you have your fleet always under full control - you know exactly when your drivers are coming and going.

The iMETOS WorkTrack agriculture GPS tracking unit combined with the Beacons feature allows you the capability of both fleet tracking and asset tracking, to manage your entire farm from equipment to employees.



On our FieldClimate platform, you see your vehicles and implements and have all data stored about where and which operations you have running. Together with your connected METOS® weather station, you can see the application of wet or dry fertilizer or chemical as well as any farm delivery, grain transport, over-the-road trucking, seed delivery, and equipment rental on the mobile phone/iPad or desktop. iMETOS WorkTrack connects all farming equipment automatically and swiftly. Companies that have implemented the iMETOS WorkTrack have improved their efficiency by 25-30% while decreasing fuel consumption by 15%. Most companies have seen these benefits within their first 30 days of activation.

## TECHNICAL SPECIFICATIONS

<b>Connectivity</b>	LTE & 2G module for multi-regional use; Cat M1/NB1 deployed bands: 2, 3, 4, 5, 8, 12, 13, 20, 26*, 28*; EGPRS quad-band, 850/900/1800/1900 MHz (* roaming bands) with internal high gain antenna
<b>GNSS</b>	GPS, GLONASS, GALILEO, BEIDOU, accuracy < 3m, internal high gain GNSS antenna
<b>Housing</b>	UV resistant polycarbonate plastic (Protection class IP67)
<b>Power</b>	(+6...+30) V DC via car power plug or with internal capacitor with solar panel
<b>Communication</b>	It uses UDP protocol for data delivery to FieldClimate platform
<b>Dimensions</b>	72,5 x 73 x 27 mm

Order number: 700212

## WorkTrack:

- Records a GPS position and speed every 5 seconds and transfers the data every 30 seconds to FieldClimate.
- It is activated with vibration and movement and records the first position when the super capacitor is sufficiently charged.
- The super capacitor can hold charge when connected to a permanent power source (tractor battery).
- In sleep mode the current uptake is below 100µAmp. It can empty a fully charged 75Ah battery within 750 000 hours. When it is connected to a switched-on power source the super capacitor will discharge within 24 hours after being disconnected from power.

### This is what you get with iMETOS WorkTrack:

- A detailed activity report about where, when, and how much the machine has been running
- Current positions of all active machines
- Enhanced work planning



*iMETOS WorkTrack used on a golf cart.*

# iMETOS Beacon

The new iMETOS Beacon is a low-cost yet fast and easy to use device that connects your machines - to save time, resources, improve productivity and profitability. With iMETOS Beacon together with iMETOS WorkTrack all your machines will be connected to the FieldClimate. You can track all your tractors, support vehicles and machines all in one place.

iMETOS Beacon comes with real-time views that include:

- GPS Location
- Hours & Mileage
- Location History
- Heading, Speed and more

Together with FieldClimate, we made it easy to monitor all your machines (tractors, support vehicles, fuel trucks, sprayers, and others). By attaching an iMETOS Beacon to whichever machine you like you'll be able to track:

- Maintenance of the device
- Work scheduling
- Fuel Logs and Automated Reporting
- Dispatching
- Movement and prevent theft



Order number: 100423

## HOW DO iMETOS WORKTRACK AND iMETOS BEACON WORK TOGETHER?

The connection between the two is fast and they work together

- to maximise the efficiency of the workforce
- completely transparent fleet tracking

You can connect up to 20 iMETOS Beacons to one iMETOS WorkTrack without worrying about running out of data storage in FieldClimate.

You mount the iMETOS WorkTrack on your tractor and each iMETOS Beacon to the device, vehicle or any other machine you want tracking.

## 1 WorkTrack = up to 20 Beacons



## **FAMILY NAME: iMETOS MobiLab & Accessories**

Indispensable tool for sap and soil-analysis.

### **BEST USED FOR:**

- Precise  $\text{NO}_3$  and  $\text{NH}_4$  soil analysis
- Precise  $\text{NO}_3$ ,  $\text{NH}_4$ , Na, Cl,  $\text{SO}_4$ , K, Ca and Mg analysis from plant sap
- Defining usage of fertilizers and pesticides
- Lowering the impact on the environment (water, biodiversity, soil, ...)

### **APPLICATIONS:**

Agriculture (crop growing), golf course, parks, smart city, research

**FAMILY MEMBERS:** iMETOS MobiLab variations & Dualex



# iMETOS MobiLab – Soil, Water and Plant Sap Analytics



Successful crop growing needs an optimized use of fertilizers. At Pessl Instruments we have developed a product line to support horticulture and agriculture in this field.

## REMOTE PLANT SENSING

The new FarmView services integrate Sentinel-2 Earth observations. This helps to determine homogeneous and inhomogeneous zones inside the fields. From this data, we can retrieve a useful soil sampling pattern.

## SAMPLING AND MEASUREMENT

The **iMETOS Soil Sampler app** records the position of the sample and the sampling time. It assigns a unique identifier (UI) to each soil and plant sap sample. After saving the UI, sampling time and position are stored in FieldClimate and an optimized workflow is suggested. Data can be synced with the LOAC Software (Windows 7 or newer). The MobiLab LabOnAChip® measures soil samples via capillary electrophoresis (CE) on small microfluidic chip in an automated manner. An internal standard (ISTD) needs to be added to the sample before measuring.



## PLANT SAP AND WATER

The **iMETOS MobiLab Lab-on-a-Chip SAP** contains everything needed for measuring plant sap. With a simple garlic press and some plastic gear one can easily take samples from leaves. The iMETOS MobiLab Lab-on-a-Chip WATER can be used to monitor irrigation water.



This project has received funding from the European Union's Horizon 2020 research and innovation programme under the grant agreement No. 765262.

## SOIL

The **MobiLab Soil Extraction** set contains the hardware to take a soil sample and prepare an extract for further measurement. The set contains a sieve and a bowl to homogenize the solid soil sample. A tube inside a tailor-made balance takes the sieved sample up. Distilled water is then added. The balance records the actual share of the sample and the water; thus error tolerant working becomes possible. Afterwards, the tube is placed on a shaker and left there for 30 minutes to extract the nitrogen compounds. Balance and shaker communicate with the MobiLab software via a USB-hub.

The **iMETOS Mobilab Lab-on-a-Chip SOIL** supplies the Lab-on-a-Chip and the necessary plastic ware to undertake the subsequent soil measurements.

### iMETOS MobiLab Lab-on-a-Chip® (soil, water or plant sap)

<b>Sample volume</b>	50 -100 µl
<b>Measurment range</b>	3-1000 ppm; 0.01-0.5 g/kg
<b>Resolution</b>	0.5 ppm; 1 mg/kg
<b>Accuracy</b>	For measurements of liquid concentrations (ppm): $\pm 3 \%$ For measurements of soil concentrations (mg/kg): $\pm 15 \%$
<b>Chip lifetime</b>	Approximately 300-500 tests
<b>Battery life</b>	2 hours of measuring time



## CONSUMABLES

Chemical solutions, plastic ware, filters and microfluidic chips will need to be replaced after every 300 measurements. **iMETOS MobiLab SOIL Consumables**, **iMETOS MobiLab WATER Consumables** and **iMETOS MobiLab SAP Consumables** deliver everything needed for the next 300 measurements. If one wants to change from soil measurement to plant sap and vice versa it will be enough to equip your system with the necessary tools and consumables.

### iMETOS MobiLab SOIL EXTRACTION®

<b>Power supply</b>	12 V adaptor for wall outlet
<b>Battery</b>	2 h working time



## SINGLE NUTRIENT MEASUREMENT

The **iMETOS NO<sub>3</sub> Electrode** is an ion selective electrode (ISE) capable of measuring nitrate. After a two point calibration the Electrode is immersed in the soil extract and returns the concentration of nitrate immediately. This value can be entered into the iMETOS MobiLab Software.

<b>Waterproof</b>	IP67
<b>Concentration range</b>	7 x 10 <sup>-6</sup> to 1 M (0.1 - 14,000 ppm as N)
<b>pH range</b>	2.5 to 11 pH
<b>Temperature range</b>	0 to 50°C
<b>Electrode resistance</b>	1 to 4 megohms
<b>Reproducibility</b>	+/- 4%
<b>Minimum sample size</b>	3 mL in a 50 mL beaker
<b>Size</b>	Electrode length - 155 mm
	Body diameter - 12 mm
	Cap diameter - 16 mm
	Cable length - 100 cm



# Dualex - Instant non-destructive Nitrate and Chlorophyll Measurement

Dualex is a leafclip sensor which measures chlorophyll and polyphenols content of plant leaves. Thanks to a patented technology, this optical sensor allows simple, fast, and non-destructive measurement of chlorophyll, flavanols and anthocyanins in leaves.



## ACCURATE MEASUREMENT OF CHLOROPHYLL

Chlorophyll plays a vital role in photosynthesis and plant development. Dualex measures the chlorophyll by analyzing the light transmitted through the leaf. Thanks to a chemical calibration made by FORCE-A, the chlorophyll is given in  $\mu\text{g}/\text{cm}^2$  in the range of 5-80  $\mu\text{g}/\text{cm}^2$ .

## UNIQUE LEAFCLIP SENSOR TO MEASURE FLAVONOLS AND ANTHOCYANINS CONTENT IN LEAVES

Flavanols are mainly synthesized after light exposure. As a consequence, they are a good indicator of plant-light interaction history. Dualex measures flavonols and anthocyanins by analyzing the screening effect of flavonols and anthocyanins on chlorophyll fluorescence. Flavanols and anthocyanins content are given in relative absorbance units from 0 to 3 for flavonols and 0 to 1.5 for anthocyanins.



## NBI®: NITROGEN BALANCED INDEX

Chlorophyll is often used as an indicator of plant nitrogen status. Several years of research and experimentation showed that polyphenols, specifically flavonols, are also good indicators of nitrogen status of plants.

NBI® (Nitrogen Balance Index) combines chlorophyll and flavonols (related to nitrogen/Carbon allocation). It's a nitrogen plant status indicator directly correlated with massic nitrogen content. The NBI® is less sensitive to the variations of environmental conditions than the chlorophyll (leaf age, leaf thickness...).

## TECHNICAL SPECIFICATIONS

<b>Measuring material</b>	Plant leaves
<b>Measuring system</b>	Transmittance and screening effect on chlorophyll fluorescence
<b>Index measured</b>	Chlorophyll (CHL), Flavonols (FLAV), anthocyanins (ANTH), NBI
<b>Accuracy</b>	5%
<b>Reproducibility</b>	4,5% for CHL, 3,5% for FLAV and ANTH
<b>Repeatability</b>	1,3% for CHL, 2% for FLAV and ANTH
<b>Area measured</b>	19,6 mm <sup>2</sup>
<b>Leaf thickness</b>	1.5 mm maximum
<b>Measurement time</b>	< 1 s
<b>User interface</b>	LCD screen, Sound warning
<b>Positioning</b>	Internal GPS
<b>Relative accuracy</b>	< 2,5 m (CEP, 50%, 24 h static)
<b>Storage capacity</b>	10 000 multiparametric data
<b>Data output</b>	.csv file
<b>Data transfer</b>	USB
<b>Operating temperature</b>	From 5 to 45 °C
<b>Battery</b>	Li-ion rechargeable
<b>Autonomy</b>	6 hours
<b>Total weight</b>	220 g
<b>Size</b>	205 x 65 x55 mm

## **FAMILY NAME: iMETOS SoilGuard**

A perfect portable tool for measuring soil moisture and temperature.

### **BEST USED FOR:**

- Work planning & water management
- Complete field's moisture profile
- Complete field's heat map based on temperature readings
- Accurate measurements

### **APPLICATIONS:**

Agriculture (crop growing), golf courses, parks, smart city

### **FAMILY MEMBERS: iMETOS SoilGuard**

# iMETOS SoilGuard



The new iMETOS SoilGuard solution is the perfect mobile tool for measuring soil moisture and temperature in turf grass, wherever you want/need and combine it with permanent readings and your own good feelings. Due to its portability and simplicity of use it enhances the efficiency and helps to optimize work planning and water management. Once in place, it measures soil moisture right in the root zone. The readings are stored on the device and whenever needed. The mobile app sends point data to Fieldclimate and within a few seconds data is visible for any other stakeholder. Together with the permanent readings and the mobile application and the spot readings from iMETOS SoilGuard you will get a complete picture of the golf course's moisture profile, the temperature readings on the various points of the green in a form of a heat map for easier understanding and further decision-making.



## KEY FEATURES:

- easy to use, mobile and rapid measurements
- easy-readable backlit display to see the values immediately
- provides up to 50,000 measurements, all with their specific GPS coordinates
- has an ergonomic design with a telescoping tubular frame
- comes with integrated Bluetooth and internal GPS therefore no additional connectivity components are necessary
- **it provides accurate measurements of:**
  - soil moisture (Volumetric Water Content %)
  - electrical conductivity (salts)
  - turf grass surface temperature

Order number: 100270

Using iMETOS SoilGuard



For improved performance and accurate measurements, you can choose between multiple lengths of measuring probes - 3.8 cm, 7.5 cm, 12 cm and 20 cm.

Order number: 100356



Order number: 100355



Order number: 100354



Order number: 100353



## **FAMILY NAME: SolAntenna**

A wireless and easy to use device for measuring temperature, humidity and CO2 levels in the storage of vegetables and fruits.

### **BEST USED FOR:**

- Preventing damage/rotting of crop before it occurs
- Management of your storage
- Fine tuning of the environmental conditions inside the storage
- Mitigating the problems with chemicals

### **APPLICATIONS:**

Agriculture (monitoring storage conditions, detecting bad seed)

### **FAMILY MEMBERS: SolAntenna**

# SolAntenna

SolAntenna is a wireless multipurpose electronic device providing automated real-time information. It was designed to collect, analyze and help with understanding storage conditions.. It measures the most critical parameters: with CO2, temperature and relative humidity in real time and where it is needed the most – in the middle of the storage.

Thanks to Solantenna, you'll always know the conditions in the storage which will help prevent damage/rotting before it occurs. Solantenna gives you 24/7 information about your storage conditions which leads to fine tuning the environmental conditions inside the storage units. Hot spots are easily detected so you won't have to use as many chemicals to mitigate the issue.

## KEY FEATURES:

- Preventing crop and money losses
- Suitable for any type of storage (bulk or box)
- Precise and specific measurements for quick actions
- Completely wireless
- Easy to use and setup – start tomorrow
- Flexible solution for every grower, especially potato





## TECHNICAL SPECIFICATIONS

### VERSION 3.0 EC

<b>Measuring range (MR)</b>	CO2: 0 – 40.000 ppm
<b>Temperature (MR)</b>	-5°C – +60°C
<b>Humidity (MR)</b>	0% – 99% RH
<b>Measuring accuracy (MA)</b>	CO2 $\pm$ 40 ppm +5% of the measured value
<b>Temperature (MA)</b>	$\pm$ 0,5°C
<b>Humidity (MA)</b>	0% – 90%, $\pm$ 1.8% RH, 90% – 95%, $\pm$ 2.3% RH 95% – 100%, accuracy $\pm$ 3% RH
<b>Sensors Types</b>	SCD41 0-40000ppm HYT-221 – temperature sensor TWLM1001 – humidity sensor

\*Important Note: Solantenna needs to be connected to LoRaWAN® network to work. You can either connect it to any existing LoRaWAN® network (that is in range) or you can order LoRaWAN® gateway at Pessl Instruments.



*LoRaWAN gateway*

## **FAMILY NAME: METOS® AOS**

METOS AOS informs the operator of a sprayer about the near real-time weather conditions. This information is used to adapt spraying speed, water amount and nozzle type to the actual vapour pressure deficit (VPD), DeltaT and the wind speed and direction.

### **BEST USED FOR:**

- Planning of plant protection activities
- Work and workforce tracking
- Crop protection

### **APPLICATIONS:**

Agriculture (crop growing)

**FAMILY MEMBERS:** METOS AOS Isobus

# METOS AOS Isobus



The METOS® AOS device is intended to support the farmer or contractor in his plant protection work, in real time. The METOS® AOS ISOBUS (Application Optimization System) is a lightweight unit that can be either mounted on the tractor or sprayer and connects with the ISOBUS terminal and mobile phone inside the cab. Once activated, METOS® AOS ISOBUS monitors the spraying weather conditions and logs real-time weather data: temperature, relative humidity, wind speed and direction on the ISOBUS terminal.

**1** Connects Ultrasonic wind speed sensor to ISOBUS terminal

**2** ISOBUS terminal - communicates with mobile phone via Bluetooth



## TECHNICAL SPECIFICATIONS

<b>Temperature</b>	-20°C - +60°C	Precision:	+/- 0.5°C
<b>Relative Humidity</b>	15% - 98%	Precision:	+/- 3%
<b>Wind Speed</b>	0.4m/s - 40 m/s	Precision:	+/- 0.2m/s
<b>Wind direction</b>	0° - 360°reading	Precision:	+/- 5°
<b>Measurement and communication interval</b>	1 sec		
<b>Communication</b>	ISOBus, CAN-Bus, BLE (Bluetooth Low Energy)		



# Sensors

**WIND**  
**TEMPERATURE**  
**SOIL TEMPERATURE**  
**LEAF**  
**PRECIPITATION**  
**SOIL MOISTURE**  
**WATER**  
**SNOW**  
**LIGHT**  
**BAROMETER**  
**PLANT**






# Pessl Instruments Ultrasonic Wind Sensor

Pessl Instruments ultrasonic wind speed sensor is a two-dimensional sonic wind sensor, built specifically for agricultural, forestry, and environmental research applications. It calculates average and maximum (gust) wind speed and direction over 5 minutes interval.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT / μMETOS CLIMA LoRa



Order number: "600023 / 900028 ( $\mu$ Metos), 600064 / 900047 (IMT)"

## TECHNICAL SPECIFICATIONS

<b>Output data format</b>	PI-bus
<b>Information transmitted</b>	Vectorial average wind speed, gust and direction
<b>Output rate</b>	1-10 min
<b>Wind module sensitivity</b>	0.12 m/s
<b>Wind module resolution</b>	0.05 m/s
<b>Wind module dynamic</b>	0.5 to 40 m/s
<b>Direction sensitivity</b>	+/-1.5°
<b>Direction resolution</b>	1°
<b>Power supply</b>	3.7V to 6V with supercap
<b>Electrical consumption</b>	0.5 mA Avg. 12 V
<b>Operating temperature without icing</b>	-15° C to +55° C
<b>Cable</b>	2.5 m / LIYCY
<b>Connection</b>	4 wires
<b>Weight of the head</b>	N/A
<b>Weight of unit assembly</b>	200 g with mounting part
<b>Mounting</b>	Pessl Instruments clamp

\*weather station measurement interval needs to be set to 5 minute value

# Pessl Instruments Wind Speed

Order number: 600034 / 900040

IM512CD is a cup type anemometer for low cost and long term, accurate wind measurements for all kinds of use. It calculates average wind speed in the specific time period.




## TECHNICAL SPECIFICATIONS

<b>Range</b>	0 to 50 m/s, gust survival 60 m/s
<b>Sensor</b>	12 cm diameter cup wheel assembly, 40 mm diameter hemispherical cups
<b>Turning factor</b>	75 cm
<b>Distance constant (63 % recovery)</b>	2.3 m
<b>Threshold</b>	1.1 m/s
<b>Transducer</b>	Stationary Coil
<b>Transducer output</b>	AC sine wave signal induced by rotating magnet on cup wheel shaft. 100 mVpp at 60 rpm. 6 Vpp at 3600 rpm
<b>Output frequency</b>	1 cycle per cup wheel revolution. 0.75 m/s per Hz

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



# Pessl Instruments

## Wind Direction

Order number: 600065 + 600166

IM511CDI is a vane type digital wind direction sensor for accurate measurements in all weather conditions. It calculates average wind direction in the specific time period.




### TECHNICAL SPECIFICATIONS

<b>Range</b>	360° mechanical, 352° electrical (8° open)
<b>Sensor</b>	Balanced vane, 16 cm turning radius
<b>Damping ratio</b>	0.2
<b>Delay distance</b>	0.5 m
<b>Threshold</b>	1.3 m/s at 10° displacement; 1.9 m/s at 5° displacement
<b>Transducer</b>	Precision conductive plastic potentiometer, 10 kOhm $\pm 20\%$ resistance 1.0 % linearity, life expectancy 50 million revolutions Rated 1 watt at 40 °C, 0 watt at 125 °C
<b>Transducer excitation requirement</b>	Embedded micro controller
<b>Output</b>	RS 485

### CONNECTION TO MOTHERBOARDS

iMETOS 3.3




# RM Young Wind Monitor

The wind monitor combines wind speed and wind direction. It is constructed of a four-blade helicoid propeller for highly accurate wind speed measurement with integrated wind direction sensor. It measures peak values.



## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



Order number: 600129 / 900064

## TECHNICAL SPECIFICATIONS

<b>Range</b>	0-100 m/s (224 mph), 0- 360°
<b>Accuracy</b>	<b>Wind Speed:</b> $\pm 0.3$ m/s (0.6 mph) or 1% of reading <b>Wind Direction:</b> $\pm 3^\circ$
<b>Operating temperature range</b>	-50 to 50 °C
<b>Threshold</b>	<b>Propeller:</b> 1.0 m/s (2.2 mph) <b>Vane:</b> 1.1 m/s (2.4 mph)
<b>Signal output</b>	<b>Wind speed:</b> magnetically induced AC voltage, 3 pulses per revolution. 1800 rpm (90 Hz) = 8.8 m/s (19.7 mph) <b>Wind direction:</b> DC voltage from conductive plastic potentiometer – resistance 10K $\Omega$ , linearity 0.25%, life expectancy – 50 million revolutions
<b>Power Requirement</b>	Potentiometer excitation: 15 VDC maximum
<b>Dimensions</b>	37 cm (14.6 in) H x 55 cm (21.7 in) L, Propeller: 18 cm (7 in) dia. Mounting: 34 mm (1.34 in) dia. (standard 1 inch pipe)
<b>Weight</b>	1.0 kg



# Hygroclip (Air temperature & Relative Humidity)

Measures relative humidity and temperature with outstanding accuracy and repeatability. It has an integrated data acquisition and calibration history. Dew point, VPD and delta T calculations available.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



$\mu$ METOS NB-IoT /  $\mu$ METOS CLIMA LoRa



Order number: 600149 / 900074 (IMT), 600148 / 900073 ( $\mu$ Metos; EcoD3)

## TECHNICAL SPECIFICATIONS

<b>Temperature sensor</b>	PT1000 1/3 Class B
<b>Humidity sensor</b>	ROTRONIC Hygromer® IN-1
<b>Accuracy with standard adjustment profile</b>	at 23 °C and 10, 35, 80 % rh $\pm 0.8$ % rh / $\pm 0.1$ °C
<b>Accuracy with high precision adjustment profile</b>	at 23 °C and 10, 20, 30, 40, 50, 60, 70, 80, 90 % rh $\pm 0.5$ % rh / 0.1 °C
<b>Resolution, AirChip3000</b>	Typically 0.02 % rh, 0.01 °C
<b>Long-term stability</b>	< 1 % rh, 0.1 °C / year
<b>Humidity response time <math>t_{63}</math></b>	3 seconds
<b>Measurement range</b>	0...100 % rh, -100...200 °C
<b>Electronics operating range</b>	-50-100 °C and 0-100 % rh
<b>Output signals</b>	Serial port RS485
<b>Audit trail &amp; electronic records</b>	FDA 21CFR Part 11 and GAMP compliant
<b>Power supply &amp; consumption</b>	3.2 V / 4 mA
<b>Housing/probe material</b>	Polycarbonate
<b>Filter</b>	Polyethylene insert, polycarbonate cage
<b>Standards</b>	CE-compliant 2007/108/EG

# Pessl Instrument Air Temperature & Relative Humidity Sensor


Measures air temperature and relative humidity and is used for low power consuming applications on  $\mu$ METOS CLIMA (LoRaWAN®, NB-IoT).

**I2C Bus Considerations:** I2C Bus is sensitive to the electromagnetic waves and can be distorted under certain conditions. On the contrary, Hygroclip is less sensitive. Recommended cable length: no longer than 1 m.



## CONNECTION TO MOTHERBOARDS

$\mu$ METOS NB-IoT /  $\mu$ METOS CLIMA LoRa



Order number: 600019 / 900026 ( $\mu$ Metos), 600009 / 900021 (LoRain)

## TECHNICAL SPECIFICATIONS

<b>Sensor</b>	HYT221
<b>Operating temperature range</b>	-40°C to +125°C
<b>Humidity range</b>	0% to 100% RH
<b>Accuracy</b>	$\pm 0.2^{\circ}\text{C}$ (0°C to +60°C) $\pm 2\%$ RH at +23 °C (0% to 90% RH)
<b>Operating voltage</b>	2.7V to 5.5V
<b>Digital interface</b>	I <sup>2</sup> C, address 0x28 or alternative address
<b>Operating voltage (limit data)</b>	0.3 V to +6 V
<b>Storage conditions</b>	-20 °C to +50 °C

## Pessl Instrument Air Temperature & Relative Humidity Sensor with a longer (5 m) cable


Measures air temperature and relative humidity with additional calculation of virtual sensors like dew point, VPD and delta T. The sensor is used for low power consuming applications on  $\mu$ METOS CLIMA (LoRaWAN<sup>®</sup>, NB-IoT).

**Application:** when long distances up to 15 m from the main station are required i.e. in greenhouses in/out, when two or more sensors are needed.



### CONNECTION TO MOTHERBOARDS

$\mu$ METOS NB-IoT /  $\mu$ METOS CLIMA LoRa



Order number: 600019 / 900026 ( $\mu$ Metos), 600009 / 900021 (LoRAIN)

## TECHNICAL SPECIFICATIONS

<b>Sensor</b>	HYT221
<b>Cable lenght</b>	5 m
<b>Operating temperature range</b>	-40°C to +60°C
<b>Humidity range</b>	0% to 100% RH
<b>Accuracy</b>	$\pm 0.2^{\circ}\text{C}$ (0°C to +60°C) $\pm 2\%$ RH at +23 °C (0% to 90% RH)
<b>Operating voltage</b>	2.7V to 5.5V
<b>Digital interface</b>	RS485 with PI-Bus, insertable in a chain
<b>Operating voltage (limit data)</b>	0.3 V to +6 V
<b>Storage conditions</b>	-20 °C to +50 °C



# Pessl Instruments Wet and Dry Bulb Temperature


Two highly reliable and tested PT1000 are built in a waterproof housing. One of them is covered with cotton tissue and wetted with water.



## CONNECTION TO MOTHERBOARDS


*Order number: 600165 / 900134*

iMETOS 3.3



*Order number: 600164 / 900132*

μMETOS NB-IoT / μMETOS CLIMA LoRa



Order number: 600165 / 900134 (iMETOS 3.3), 600164 / 900132 (μMETOS)

## TECHNICAL SPECIFICATIONS

<b>Sensor</b>	PT1000
<b>Supply voltage</b>	4.57-7 V for chain version
<b>Supply current</b>	max. 200 μA
<b>Short circuit protection</b>	Infinite (within supply voltage range)
<b>Short circuit supply current</b>	max. 40 mA
<b>Operating temperature range</b>	-30 °C to +60 °C
<b>Accuracy</b>	0.1 °C
<b>Cable length</b>	5 m

# Pessl Instruments Soil Temperature


The Soil Temperature Sensor is a PT1000 in a waterproof stainless-steel housing. The sensor output is a duty-cycle signal.



---

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



Order number: 600159 / 900124 (iMETOS 3.3), 600020 / 900027 (μMETOS, ECHO)

## TECHNICAL SPECIFICATIONS

<b>Sensor SMT172</b>	<b>Operating temperature range:</b> -30 °C to +75 °C <b>Accuracy:</b> ±0.5 °C (-30 °C to +75 °C)
<b>Sensor PT1000</b>	<b>Operating temperature range:</b> -30 °C to +75 °C <b>Accuracy:</b> ±0.1 °C (-30 °C to +75 °C)
<b>Supply voltage</b>	4.57-7 V
<b>Supply current</b>	max. 200 μA
<b>Short circuit protection</b>	infinite (within supply voltage range)
<b>Short circuit supply current</b>	max. 40 mA
<b>Calibration error</b>	max. 0.25 °C (23 °C)
<b>Nonlinearity error</b>	max. 0.2 °C
<b>Supply voltage sensitivity</b>	max. 0.1 °C/V
<b>Repeatability</b>	max. 0.2 °C
<b>Long term drift</b>	max. 0.1 °C
<b>Output frequency</b>	1 to 4 kHz
<b>Evaluation</b>	Duty cycle
<b>Cable length</b>	5 m

# Pessl Instruments Multiple Soil Temperature

Order number: 600079 / 900058

SAR19/SAR19M provides soil temperature measurement from several centimeters to 15-meter deep by using the Pessl Instruments sensor BUS. The distance between the sensors can be chosen according to the application, but only up to 10 sensors can be attached to one sensor chain.




## TECHNICAL SPECIFICATIONS

<b>Temperature sensor</b>	DS18B20
<b>Operating temperature range</b>	-55 °C to +125 °C
<b>Supply DC voltage (range)</b>	3-5.5 V
<b>Thermometer error -10 °C to +85 °C</b>	±0.3 °C
<b>Drift</b>	±0.2 °C
<b>Data transmission</b>	Rs 485 Digital signal (temperature data sent on demand of iMETOS main board)

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



# Pessl Instruments Single Soil Temperature

Order number: 600020

WMTEMP is a soil temperature sensor.




## TECHNICAL SPECIFICATIONS


<b>Temperature sensor</b>	DS18B20
<b>Operating temperature range</b>	-55 °C to +125 °C
<b>Supply DC voltage (range)</b>	3-5.5 V
<b>Thermometer error -10 °C to +85 °C</b>	±0.3 °C
<b>Drift</b>	±0.2 °C
<b>Data transmission</b>	Rs 485 Digital signal (temperature data sent on demand of iMETOS main board)

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT / μMETOS CLIMA / μMETOS SOIL



## INTERFACE

Necessary Interface to connect this sensor with iMETOS:

ECH871EXT, ECH874EXT or ECH871INT, ECH874INT or RFRN09, RFRN12 or WM-BUS




# Pessl Instruments Heavy Duty Multiple-temperature Probe

Multiple-temperature probe is a thermometer, designed to make measurements in extremely harsh conditions like temperature of waste on disposal sites, and chipped wood in storage rooms.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT / μMETOS CLIMA LoRa




## TECHNICAL SPECIFICATIONS

<b>Operating temperature range</b>	-55 °C to +125 °C
<b>Supply DC Voltage (range)</b>	3-5.5 V
<b>Thermometer error -10 °C to +85 °C</b>	±0.3 °C
<b>Drift</b>	±0.2 °C
<b>Data transmission</b>	<p>Rs 485 Digital signal (temperature data sent on demand of iMETOS main board)</p> <p>iMETOS checks all sensors every 5 minutes</p>

# PI Asparagus multi temperature probe

That specific multiple sensor measures air temperature at the surface and soil temperatures at different soil depths (10 cm, 20 cm, 30 cm and 40 cm) in a soil profile with high accuracy.



The growth model for asparagus is implemented in FieldClimate (Section: Accumulation Tool) and calculates different stages/parameters of the plant growth, for example vernalization, harvesting conditions, quality, and critical damage (hollow stem) based on data input.

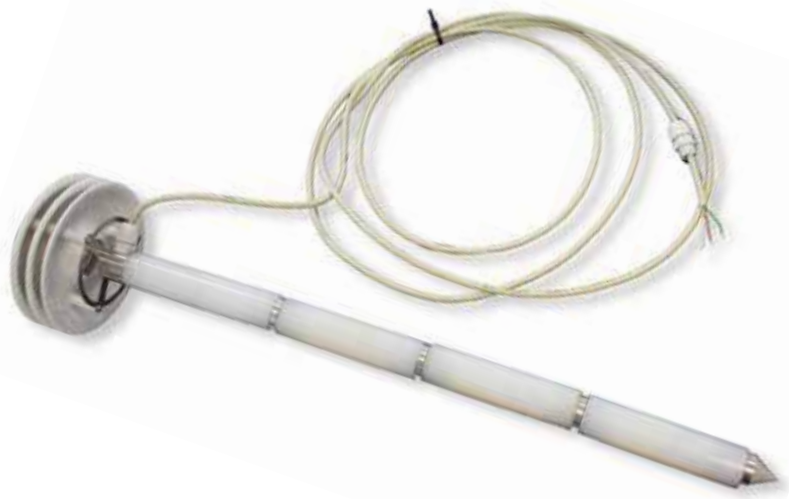

## CONNECTION TO MOTHERBOARDS

μMETOS NB-IoT / μMETOS CLIMA LoRa

iMETOS 3.3



Order number: 600158 / 900203

## TECHNICAL SPECIFICATIONS

Temperature sensor	DS18B20
Operating temperature range	-55 °C to +125 °C
Supply DC voltage (range)	3-5.5 V
Thermometer error -10 °C to +85 °C	±0.3 °C
Drift	±0.2 °C
Data transmission	Rs 485 Digital signal (temperature data sent on demand of iMETOS main board)

# Pessl Instruments Leaf Temperature


IM522CD is a highly accurate leaf temperature sensor. It measures the radiated temperature around the surface of a leaf or a canopy.



---

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



Order number: 600127 / 900169 (IMT), 600126 / 900171 ( $\mu$ Metos)

## TECHNICAL SPECIFICATIONS

<b>Sensor</b>	PT1000
<b>Accuracy</b>	min. 0.1 °C (-30 °C to +99 °C)
<b>Supply current</b>	max. 200 $\mu$ A
<b>Short circuit protection</b>	Infinite (within supply voltage range)
<b>Short circuit supply current</b>	max. 40 mA
<b>Operating temperature range</b>	-30 °C to +99 °C
<b>Nonlinearity error</b>	max. 0.2 °C
<b>Supply voltage sensitivity</b>	max. 0.1 °C/V
<b>Repeatability</b>	max. 0.2 °C
<b>Long term drift</b>	max. 0.1 °C
<b>Output frequency</b>	1 to 4 kHz
<b>Duty cycle</b>	0.320 (0 °C), 0.00470 °C
<b>Evaluation</b>	Analog
<b>Cable length</b>	5 m



# Pessl Instruments IR Temperature


The infrared temperature sensor infers the temperature from a portion of thermal radiation (blackbody radiation) emitted by the object being measured. It is a non-contact temperature sensor. By measuring the amount of infrared energy emitted by the object and its emissivity, the object's temperature can be determined. Main use: canopy or leaf temperature measurements.



---

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



Order number: 600131 / 900066

## TECHNICAL SPECIFICATIONS

<b>Sensor</b>	Melexis MLX90614-BCC
<b>Resolution</b>	0.1 °C
<b>Interface</b>	RS 485 PI Sensor Bus
<b>Size</b>	20 mm (dia) x 24 mm
<b>Sensor housing</b>	Weather resistant PAS
<b>Range</b>	-40 °C to +85 °C


# Pessl Instruments Leaf Wetness

The leaf wetness sensor works by measuring the conductivity on a filter paper, which is held between two stainless steel electrodes in a transparent holder. The use of transparent Lucite plastic as a holder reduces the warming up of the sensor when it is exposed to direct sunlight.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT / μMETOS CLIMA LoRa



Order number: 600015 / 900025

## TECHNICAL SPECIFICATIONS

<b>Supply voltage</b>	4.75-5.25 V
<b>Supply current</b>	max. 1500 µA
<b>Short circuit protection</b>	Infinite (within supply voltage range)
<b>Dry / Wet threshold</b>	220-390 kOhm
<b>Output</b>	Dry: max. 0.4 VDC Wet: min. VCC-0.4 VDC
<b>Electronic</b>	Totally plastic encapsulated – SMD
<b>Dimensions</b>	42 mm x 78 mm x 15 mm
<b>Cable length</b>	5 m

# Pessl Instruments Rain Gauge

The mechanic consists of a magnet, which moves past a reed switch and opens or closes the circuit. The double spoon tips left or right and does not lose any water due to a very fast switching mechanics. The resolution with a surface of 200 cm<sup>2</sup> is 0.2 mm, while the resolution with the 80 cm<sup>2</sup> is 0.5 mm. Heating for rain gauge can also be included.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT / μMETOS CLIMA LoRa / μMETOS SOIL



Order number: 600157 / 900163

## TECHNICAL SPECIFICATIONS

<b>Sensor type</b>	Double tipping bucket rain gauge
<b>Output</b>	Switch signal
<b>Switch</b>	Reed contact, solid state
<b>Sensitivity</b>	1 tip per 0.2 mm or 1 tip per 0.5 mm
<b>Collector surface</b>	200 cm <sup>2</sup>
<b>Evaluation</b>	Digital
<b>Maximum rain</b>	12 mm/minute
<b>Dimensions</b>	185 mm diameter x 250 mm H
<b>Accuracy</b>	±5 %

Protect your rain gauge from birds - add bird protection crown. Very easy to install and dismantle.

Order number: 900191






# Pessl Instruments Soil Moisture & Soil Temperature Sensor PI54-D

The PI54-D soil moisture and soil temperature sensor has a larger volume of influence. It determines volumetric water content (VWC) by measuring the dielectric constant of the soil using capacitance technology and soil temperature. It is 10 cm long and thus measures 1 Liter of soil, while high frequency minimizes salinity and textural effects which makes PI54-D accurate in most soils.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT / μMETOS CLIMA LoRa / μMETOS SOIL



Order number: 600118 / 900012

## TECHNICAL SPECIFICATIONS

Volumetric water content (VWC)	<b>Range:</b> 0–0.57 m <sup>3</sup> /m <sup>3</sup> (0%–57% VWC)
	<b>Resolution:</b> 0.0008 m <sup>3</sup> /m <sup>3</sup> (0.08% VWC) in mineral soils from 0–0.50 m <sup>3</sup> /m <sup>3</sup> (0%–50% VWC)
	<b>Accuracy:</b> With standard calibration equation, 0.03 m <sup>3</sup> /m <sup>3</sup> (3% VWC) typical in mineral soils that have solution electrical conductivity <10 dS/m NOTE: With soil-specific calibration, ±0.02 m <sup>3</sup> /m <sup>3</sup> (±2% VWC) is typical in any soil.
Dimensions	16.0 cm (6.3 in) length; 3.3 cm (1.3 in) width; 0.8 cm (0.3 in) height
Prong length	10 cm (3.94 in)
Operating temperature range	-40 to 50 °C
Cable length	5 m
Supply voltage (VIN to GND)	Minimum: 3.6 VDC at 12 mA Maximum: 15 VDC at 20 mA
Measurement duration	Maximum 10 ms
Temperature accuracy - PI54-D	±0.3
Output	Digital

miniMETOS SOIL, LoRATH soil,  
LoRAIN soil



## INTERFACE

Necessary Interface to connect this sensor with iMETOS:

600069 / 900052, 600068 / 900051, 600167 /  
900057 or 900173, 900174, 900175


# Sentek Drill & Drop and TriSCAN Probe

Sentek Drill & Drop probe provides the user with great flexibility for precision monitoring of temperature, water, and salinity (Triscan) at multiple depths in a soil profile. Available in five lengths: 10 cm, 30 cm, 60 cm, 90 cm and 120 cm with sensors fixed at every 10 cm increment.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT / μMETOS SOIL



Order number: 600098 / 900104, 600099 / 900106, 600100 / 900107, 600101 / 900108, 600102 / 900109, 600103 / 900110, 600104 / 900111, 600105 / 900112, 600106 / 900113, 600107 / 900114

## TECHNICAL SPECIFICATIONS

<b>Probe lengths</b>	10 cm (4") / 30 cm (12") / 60 cm (24") / 90 cm (36") / 120 cm (48")
<b>Number of sensors</b>	1 / 3 / 6 / 9 / 12
<b>Outer probe diameter (top-bottom)</b>	24-24.5 mm / 28-29.5 mm / 27-29.5 mm / 26-30 mm / 24.5-29.5 mm
<b>Moisture (VWC) range</b>	Oven dry to saturation
<b>Method</b>	Capacitance based technology
<b>Resolution</b>	<b>Moisture (VWC):</b> 1:10000 <b>Salinity (Triscan) (VIC, Volumetric Ion Content):</b> 1:6000 <b>Temperature:</b> 0.3 °C
<b>Moisture precision</b>	±0.03 % vol.
<b>Temperature accuracy</b>	±2 °C at 25 °C
<b>Operating temperature range</b>	-20 °C to 60 °C


## INTERFACE

Necessary Interface to connect this sensor with iMETOS:  
600150/900105

# iMETOS AC Probe


## Aquacheck Sub-Surface Probe

The Aquacheck sub-surface soil moisture probe offers capacitance-based soil moisture and temperature measurements along the vertical soil profile. Different configurations are available with 6, 8 or 12 sensors for a probe length variable from 60 to 120 cm.

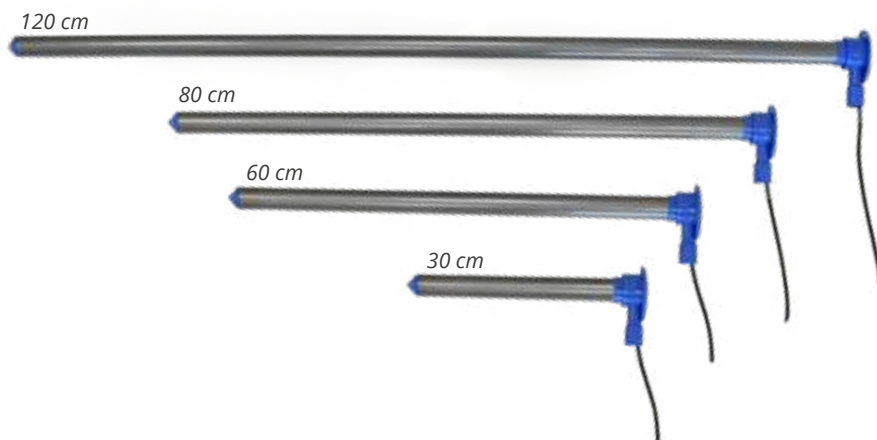


## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



$\mu$ METOS NB-IoT /  $\mu$ METOS SOIL



Order number: 600123 / 900115, 600141 / 900116, 600142 / 900117, 600143 / 900118

## TECHNICAL SPECIFICATIONS

<b>Probe lengths</b>	from 60 to 120 cm
<b>Number of sensors</b>	6 / 8 / 12 sensors depending on the configuration
<b>Shaft Diameter</b>	32 mm
<b>Moisture (VWC) range</b>	Oven dry to saturation
<b>Method</b>	Capacitance based technology
<b>Temperature range</b>	0 °C to 51 °C
<b>Temperature resolution</b>	0.2 °C
<b>Cable length</b>	5 m

## INTERFACE

Necessary Interface to connect this sensor with iMETOS:  
600150/900105

# Irrrometer Watermark Soil Moisture Sensor


The Watermark Sensor consists of two concentric electrodes buried in a special reference matrix material that is held in place by a synthetic membrane. The matrix material has been selected to reflect the maximum change of electrical resistance over the growth range of crop production, as well as to neutralize the effect of soil salinity. In operation, soil moisture is constantly being absorbed or released and the electrical resistance between the electrode's changes. This resistance is read and logged by the weather station.

The sensor is manufactured from non-corrosive materials and lasts up to three years.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT / μMETOS SOIL





Order number: 600120 / 900010

## TECHNICAL SPECIFICATIONS

<b>Size</b>	2.2 cm diameter x 5 cm length
<b>Measuring principle</b>	Soil water tension correlated with electrical resistance in granular matrix
<b>Working range</b>	0 to 200 kPa
<b>Precision</b>	5 %
<b>Evaluation</b>	Analog
<b>Cable length</b>	3.5m / 10m

## INTERFACE

Necessary Interface to connect this sensor with iMETOS:

600068 / 900051, 600167 / 900057, 900174, 900175


# Irrrometer Tensiometer

The instrument measures soil water tension (or suction). This value represents the energy a plant's root system uses to draw water from the soil. Understanding soil moisture dynamics helps the user make informed irrigation scheduling decisions, resulting in improved yield quantity and quality while reducing water, fertilizer, labor, and energy costs. Available in different lengths: 15 cm, 30 cm, 45 cm, 60 cm and 90 cm.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



$\mu$ METOS NB-IoT/SOIL



Order number: TNS101

## TECHNICAL SPECIFICATIONS

<b>Instrument body materials</b>	Butyrate body, ceramic tip, neoprene stopper
<b>Weight</b>	30 cm weights 0.439 kg. It increases 0.114 kg per 30 cm
<b>Ceramic tip</b>	White tip – used for most soil types
<b>Operating suction</b>	0-90 kPa
<b>Operating temperature range</b>	0 °C to 50 °C
<b>Reservoir dimensions</b>	Height: 120-130 mm including cap; Diameter: 51-55 mm including cap
<b>Body tube dimensions</b>	Length: ranges from 15 to 90 cm; Diameter: 22 mm


## INTERFACE

Necessary Interface to connect this sensor with iMETOS:

600069 / 900052, 600068 / 900051, 600167 / 900057 or 900173, 900174, 900175

# EC & pH Interface Box with Display in IP65 Box

The EC500PH EC & pH Interface box is a measuring device with display in IP65 Box to be integrated into any iMETOS sensor chain interface for continuous EC & pH measurements in water. It is compatible with most industry standard EC & pH sensors. The actual reading can be seen on the display. With the built-in calibration mode, all sensor readings can be calibrated and checked from time to time.

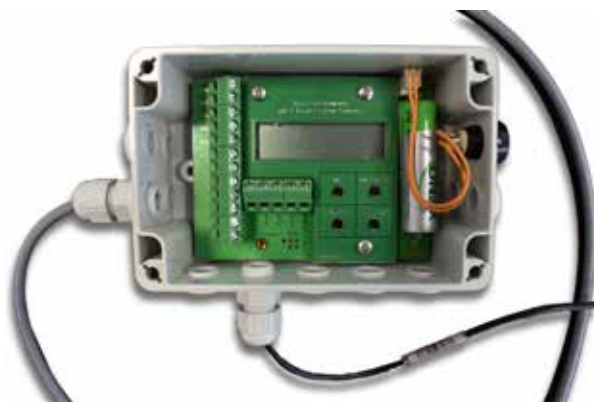


## Connection Possibilities


- 1 EC Sensor (Part.no. EC501)
- 1 pH Sensor (Part.no. PH501)

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT/CLIMA



Order number: 600025 / 900029

## TECHNICAL SPECIFICATIONS

### General information

Display shows actual data by pressing the button. It works with iMETOS 3.3.

### Cable length

5 m standard, custom cable lengths available upon request



# Pessl Instruments Electrical Conductivity

Order number: 600145 / 900032

The conductivity sensor provides a complete self contained measurement. The sensor utilizes a reliable and robust sensor for conductivity measurement and a thermistor for temperature measurement. The sensor is ideal for hydrographical and environmental water monitoring, in agriculture and industrial applications. The durable design ensures suitability for the harshest environment applications.



## TECHNICAL SPECIFICATIONS

<b>Range</b>	0.1 $\mu\text{S}/\text{m}$ - 1000 $\text{mS}/\text{cm}$
<b>Resolution</b>	0.1 $\mu\text{S}/\text{cm}$
<b>Temperature compensation</b>	Automatic
<b>Probe material</b>	PP
<b>Probe diameter</b>	12 mm
<b>Min. immersion</b>	40 mm

## INTERFACE

Necessary Interface to connect this sensor with iMETOS:  
600025 / 900029 Interface box with display

# Pessl Instruments pH Sensor

Order number: 600144 / 900030

The pH sensor is a reliable and cost-effective sensor for measuring the pH value of various aqueous solutions. The pH scale covers values between 0 and 14.

Acids have pH values between 0 and 6; caustic solutions have pH values between 8 and 14. Value 7 is neutral.



## TECHNICAL SPECIFICATIONS

<b>Range</b>	pH 0.00 to 14.00
<b>Resolution</b>	0.001 pH
<b>Accuracy</b>	±2 % F.S.
<b>Temperature deviation</b>	3 % (range 5 °C to 30 °C)
<b>pH probe</b>	Standard up to 0.1 bar (other types on request), 3 m cable, 2-ring-flow-through (please specify type of application)
<b>pH calibration</b>	2-point with automatic buffer (recognition pH 4.0 and pH 7.0)
<b>Probe material</b>	Glass
<b>Probe diameter</b>	12 mm
<b>Min. immersion</b>	35 mm
<b>Operating temperature range</b>	15 °C to 60 °C
<b>Response time</b>	≤ 90 s

## INTERFACE

Necessary Interface to connect this sensor with iMETOS:  
600025 / 900029 Interface box with display




# Pessl Instruments Pressure Switch

Simple and robust design makes pressure switch suitable for use with compressed air, hydraulic oil, oil emulsions and water. Detection threshold is 0.5 bar (7.25 psi) and switch off is at 0.25 bar (3.62 psi) (other values on demand). The main purpose of this sensor is to control/check the performance of the irrigation system in different types of applications (resistance to high pressure makes it usable also for frost protection system).




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT/SOIL



Order number: 600168 / 900198

## TECHNICAL SPECIFICATIONS

<b>Material</b>	Zinc-plated steel (G 1/4")
<b>Switching function</b>	Open contact, closed contact, changeover
<b>Media</b>	Water, compressed air, hydraulic oil, oil emulsion
<b>Maximum medium temperature</b>	+85 °C
<b>Adjustment ranges</b>	1 to 10 bar (1.4-14 psi), 0-1 bar
<b>Switching frequency</b>	max. 200 /min
<b>Switching pressure difference</b>	10 to 15 %
<b>Switching voltage</b>	Open contact/closed contact 42V max. 2A; Changeover 250 V max. 2A

# Pessl Instruments Water Counter Interfaces

*Order number: 600155*

These interfaces support most of the water meters used in irrigation with a pulse output.

**Applications:** Irrigation management, irrigation consulting, smart irrigation, irrigation tractability and bookkeeping, alarms, and supervision. Used widely in open field crops, hydroponics, and green house.

**SW1000** pulse counter (Reed/Rain input)



iMETOS 3.3



# Pessl Instruments Pipe Pressure (WPS)

This sensor enables continuous monitoring of the pressure in irrigation pipes (main pipe or sector pipes) and it measures up to 50 bar, so it can be used in all types of irrigation systems (drip irrigation, sprinkler, hydroponics ...).


Technical specification of the full scale and resolution can be changed in the benefit of the user.

**Applications:** Irrigation monitoring and supervision, identification of pressure loss in the installation.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT / μMETOS SOIL



Order number: 600154

## TECHNICAL SPECIFICATIONS

<b>Range</b>	0 to 500 m of water column
<b>Resolution</b>	10 mbar
<b>Accuracy</b>	0.3 %
<b>Operating temperature range</b>	0 °C to 50 °C
<b>Storage temperature range</b>	-20 °C to 80 °C
<b>Weight</b>	300 g (including cable)
<b>Housing</b>	POM
<b>Diaphragm</b>	Ceramic
<b>Cable sheath</b>	Shielded PVC
<b>Output signal</b>	Serial (RS485)
<b>Support</b>	PI-bus only at the end of the chain
<b>Dimensions gauge shaft</b>	90 x 20 mm (height x diameter)

# Pessl Instruments Water Level Sensor


The Water level sensor is an accurate and cost effective submersible water level sensor that can be connected to METOS® stations with the precision of 3 mm within the measurement ranges. Sensor has an integrated barometric sensor module to increase precision. Pressure (Measuring) ranges: 0 mWC up to 5 mWC (other distances on request). Special cable is also available.

**Applications:** Depth or level measurement in wells and open waters (rivers and lakes) and ground water level measurement.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



µMETOS NB-IoT / µMETOS SOIL



Order number: 600026 / 900201, 600153

## TECHNICAL SPECIFICATIONS

<b>Accuracy according to IEC 60770</b>	Limit point adjustment (nonlinearity, hysteresis and repeatability) within $\pm 3$ % within the measurement ranges
<b>Response time</b>	~ 5 ms
<b>Range</b>	0 to 20 m of water column (other on request)
<b>Resolution</b>	1 mm
<b>Accuracy</b>	0.5 % of maximum water level
<b>Operating temperature range</b>	0 °C to 50 °C
<b>Storage temperature range</b>	-20 °C to 80 °C
<b>Weight</b>	1.1 kg (including cable)
<b>Housing</b>	Stainless steel 1.4301
<b>Diaphragm</b>	Ceramic
<b>Seals</b>	FKM
<b>Cable sheath</b>	Shielded PVC
<b>Output signal</b>	Serial (RS485)
<b>Support</b>	PI-bus only at the end of the chain
<b>Dimensions gauge shaft</b>	90 x 20 mm (height x diameter)






# Pessl Instruments Ultrasonic Snow Height or Water Depth Sensor

Ultrasonic snow depth sensor is used for non-contact measurements of snow depth and river levels in extreme weather conditions. The sensor is characterized by its high level of operating reliability, low energy consumption, fast installation and ease of use in the field.



## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



Order number: 600173 / 900209

## TECHNICAL SPECIFICATIONS

<b>Range</b>	0 to 10 m
<b>Resolution</b>	10 mm
<b>Accuracy</b>	0.5 % (FS)
<b>Measurement principle</b>	Ultrasonic
<b>Temperature measurement range</b>	-40 °C to +60 °C
<b>Digital RS-232 interface</b>	Serial port protocol, distance or snow depth
<b>Power supply</b>	From the input of the iMETOS, in areas with limited sun extended battery is needed (ord. no. USH8-BATT-EXT).
<b>Ingress protection</b>	IP 66



To connect Snow Depth Sensor to the motherboard, you will need **MOD BUS** interface.


# Pessl Instruments Pyranometer

The IM506D Pyranometer is designed for field measurements of global solar radiation in agricultural, meteorological, and solar energy studies. In clear, unobstructed daylight, the Pessl Instruments pyranometer has favorable results compared to the first class thermopile-type pyranometers, but is priced at just a fraction of the cost.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



$\mu$ METOS NB-IoT /  $\mu$ METOS CLIMA LoRa



Order number: 600021 / 900002 ( $\mu$ Metos), 600035 / 900000 (IMT)

## TECHNICAL SPECIFICATIONS

<b>Sensor</b>	LI-200SZ
<b>Calibration</b>	Calibration against Kipp & Zonen CMP3 under daylight. Absolute error max. 5 %, typically 3 %
<b>Stability</b>	2 % drift on 2-year use
<b>Time to measure</b>	10 $\mu$ s
<b>Temperature dependency</b>	0.15 % per °C
<b>Cosines correction</b>	Sensor corrects up to 80° degrees
<b>Azimuth</b>	1 % error over 360 degree at 45 degree elevation
<b>Operating temperature range</b>	-20 °C to 65 °C
<b>Operating relative humidity range</b>	0 to 100 %
<b>Sensor</b>	Photodiode
<b>Housing</b>	Weatherproof PAS case with acrylic diffuser, stainless steel hardware
<b>Size</b>	35 mm diameter, 45 mm height
<b>Weight</b>	114 g
<b>Evaluation</b>	Pulse Wide Modulation 0-80 % = 0-2000 W/m <sup>2</sup>
<b>Spectral range</b>	300-1100 nm

# Pessl Instruments PAR Quantum



Photosynthetically Active Radiation (PAR) is typically measured as Photosynthetic Photon Flux Density (PPFD), which has units of quanta (photons) per unit of time per unit of surface. The units most often used are micromoles of quanta per second per square meter ( $\mu\text{mol s}^{-1} \text{ m}^{-2}$ ). Plant scientists, horticulturists, ecologists, and other environmental scientists use MD507D Quantum Sensors to accurately measure this variable.



## CONNECTION TO MOTHERBOARDS

iMETOS 3.3

$\mu$ METOS NB-IoT /  $\mu$ METOS CLIMA LoRa



Order number: 600078 / 900005

## TECHNICAL SPECIFICATIONS

<b>Sensor</b>	EG&G VACTEC VTB1012B
<b>Calibration</b>	Calibration against LI-190SZ under daylight. Absolute difference max. 5 %, typical 3 %
<b>Linearity</b>	Maximum deviation of 1 % up to 3000 W/m <sup>2</sup>
<b>Stability</b>	2 % change over a 1-year period
<b>Response time</b>	150 ms
<b>Temperature dependency</b>	0.15 % per °C
<b>Cosines correction</b>	Sensor corrects up to 80° degrees
<b>Azimuth</b>	1 % error over 360 degrees at 45 degree elevation
<b>Operating temperature range</b>	-20 °C to 65 °C
<b>Operating relative humidity range</b>	0 to 100 %
<b>Sensor</b>	Photodiode
<b>Housing</b>	Weatherproof PAS case with acrylic diffuser, stainless steel hardware
<b>Size</b>	35 mm diameter, 45 mm height
<b>Weight</b>	114 g
<b>Evaluation</b>	PWM: 0-80 % duty cycle = 0-20 kJ/m <sup>2</sup>


# Pessl Instruments Barometer

The Pessl Instruments barometric sensor measures the “absolute air pressure” of the atmosphere on site. It is designed for application of environmental protection, where high accuracy, quick response, long term stability and reliability are required. The instrument is suitable for indoor and outdoor use. A tempered piezoceramic sensor for absolute pressure is used, characterized by its thermal and mechanical stability.




## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



μMETOS NB-IoT/CLIMA





Order number: 600157 / 900163

## TECHNICAL SPECIFICATIONS

<b>Working range</b>	0-1150 mbar
<b>Weight</b>	ca. 50 g
<b>Power supply</b>	5.0 VDC (6 VDC maximum)
<b>Zero offset</b>	0.50 ±0.09 VDC
<b>Power uptake</b>	max. 20 mA
<b>Precision</b>	0.1 % max. Thrift
<b>Temperature range</b>	-40 °C to 125 °C
<b>Measuring type</b>	Serial (RS 485)

# Pessl Instruments Dendrometer


Dendrometers are sensors for continuous measurement of plant growth (changes of the plant diameter). The dendrometer allows us to record the plant parameters using the same time interval as environmental parameters. The data allows the direct assignment of plant responses and stress to environmental influences. Dendrometers are a cost-effective and useful tool for Eco physiological studies.



---

## CONNECTION TO MOTHERBOARDS

iMETOS 3.3



Order number: 100358, 100359, 100361, 100360

## TECHNICAL SPECIFICATIONS

<b>To specify plant size range</b>	Diameter 3-30 cm
<b>Range of the sensor</b>	11 mm
<b>Accuracy</b>	$\pm 1.5 \mu\text{m} \pm 0.12 \%$ (CR1000 Logger)
<b>Resolution</b>	0.2-2.6 $\mu\text{m}$ (dependent on used data logger)
<b>Linearity</b>	1 %
<b>Thermal expansion coefficient of the sensor</b>	$< 0.1 \mu\text{m/K}$
<b>Operating temperature range</b>	-25 to 70 °C
<b>Operating relative humidity range</b>	0 to 100 %

## INTERFACE

Necessary Interface to connect this sensor with iMETOS:  
600170 / 900205

# Software & Services



# FieldClimate Platform & METOS Documentation

## FieldClimate PLATFORM



fieldclimate.com



## VISIT METOS.AT FOR EXTENSIVE METOS DOCUMENTATION

We are constantly updating and adding relevant content about disease models, weather forecast, irrigation management and other services, along with technical documentation and answers to frequently asked technical questions.



www.metos.at

# Our Mobile Applications

## FieldClimate MOBILE APP




**FieldClimate platform and mobile app are free of charge and are included in the hardware price of all METOS devices.**

# FarmView

## THE PREMIUM SERVICE IN FieldClimate

FarmView enables you to visualize data at the level of farm, field and cropzone.

**Data zonation, into cropzones**, in a combination between in-field METOS measurements plus satellite remote sensing data allow users to detect and **redirect the attention to specific spots**; optimizing field management.

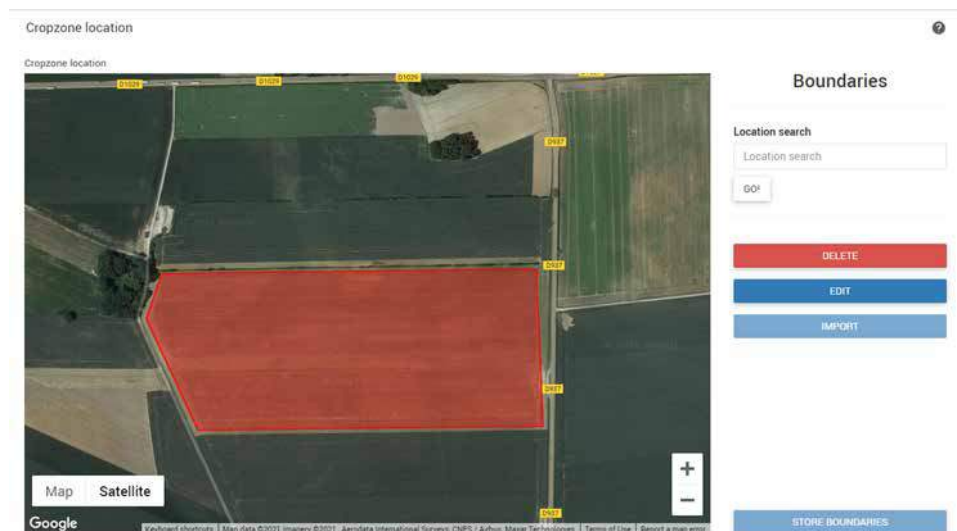

The ability to combine what you see from the above - via **satellite imagery** - with in-field corrections, allows local improvements to **equalize field heterogeneity and upgrade yield**. Corrections can go from **irrigation management** (with a possible precision positioning of soil moisture probes and weather stations) to **plant health adjustments** or DualEx and Mobilab readings to track nutrition conditions.

Moreover, **Daily Water Balance** is given as the output of crop evapotranspiration and irrigation records, to support **precise decision-making** in water management.




# FarmView Water Balance Module

The **Water Balance module** (Irrimet) allows users to **better plan irrigation decisions** with crop evapotranspiration, rootzone development, precipitation and irrigation records as the inputs.

The Daily Water Balance, as the output, **provides a full view of water balancing status** throughout the season.


## FarmView Soil Moisture Page

The **Soil Moisture Page** is a useful tool to **monitor soil moisture** via sum and individual depth behavior, measured by profile sensors. Furthermore, a soil moisture sum widget is displayed on the dashboard, **allowing quick evaluation and immediate actions**.

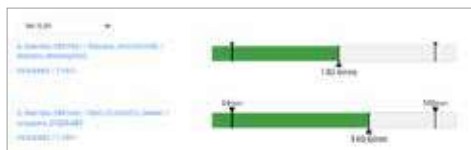

# FarmView Satellite Page

The **Satellite page** is an upgraded service of FarmView. **Satellite remote sensing data** quantifies **LAI (Leaf Area Index)** and **NDVI (Normalized Difference Vegetation Index)** on the cropzone level. These indexes give a full scanning of the field during crop development, also detecting anomalies within weaker and stronger spots regarding **biomass and plant health status**.

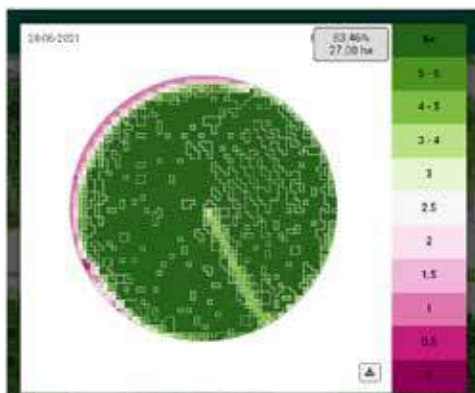

The page contains LAI and NDVI **graphs**, to monitor **crop growth status** (in qualitative and quantitative ways) throughout the growing season, together with **satellite images of 10-meter resolution**, derived from Sentinel-2 Satellite.

**OPTIMIZE CROP GROWTH WITH IDENTIFICATION OF SPOTS THAT REQUIRE MORE ATTENTION IN YOUR FIELD!**



## COMPARE DATA APPLICATIONS AND SEE WHAT SUITS YOU THE MOST...


	FieldClimate	FarmView	FarmView Satellite
Overview of all sensor data	✓	✓	✓
Device management - Sensor data and settings	✓	✓	✓
Soil moisture monitoring	✓	✓	✓
Water balance	✗	✓	✓
CropZone-based visualization	✗	✓	✓
Cultivation period and plant specific setup	✗	✓	✓
Soil moisture SUM widget	✗	✓	✓
Irrigation calendar	✗	✓	✓
Sentinel-2 satellite LAI and NDVI maps	✗	✗	✓

# Weather Forecast & Work Planning Tools

WEATHER FORECAST, WORKFORCE PLANNING, FIELD ACCESSIBILITY, SPRAY WEATHER

## HYPER-LOCAL STATION-CORRECTED WEATHER FORECAST

With METOS weather station, you get the best forecast for your farm and fields by: using real-time local measurements to post-correct modeled forecast output, eliminating model bias and updating the forecast frequently with the last data from your station, satellite and radar. Artificial intelligence is further used to increase the models skill and optimally combine/select the best forecast models at any particular location.

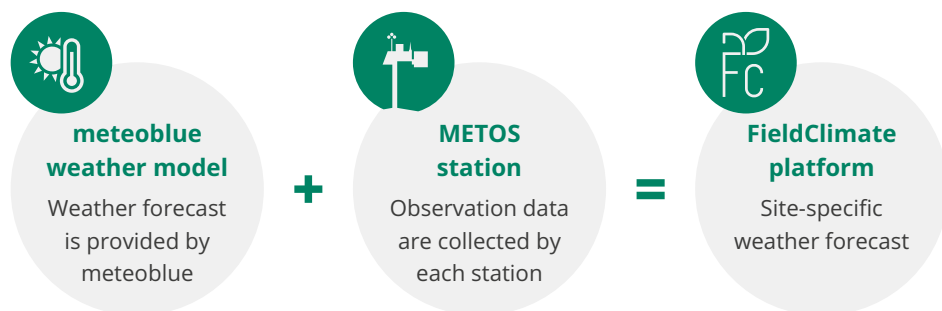

## SAVE TIME, INCREASE YOUR YIELDS

A 3 or a 7-day weather forecast of all the important meteorological variables including services such as work planning, animal production and disease risk models, helps:

- **Plan the work week** based on a localised weather forecast for your operations site
- **Better organize your work day** based on the actual rain and temperature data and the hourly updated weather forecast for your field
- **Protect your crop from frost** by monitoring accurate temperature forecasts updated on an hourly basis
- **Optimize and reduce crop treatments** based on site-specific disease models and predictions
- **Plan your fertilization application** with accurate hourly weather forecasts
- **Plan your irrigation** based on actual ET - crop use and predicted plant water use
- **Know the best hours to access your fields** for the next several days based on soil tractability
- **Know when to plant, sow and harvest** your crop considering adequate availability of seed zone soil moisture, optimal temperature and more weather conditions
- **Maximize your yield and quality** with optimized weather risk forecasts of your fields



# Disease Models



A plant disease model is a mathematical description of interactions among the environment, the host plant and the variables related to the pathogen that can lead to the development of the disease. The more advanced models are those which can predict the impact or severity of the disease and the development of inoculum.

Pessl Instruments models have been developed to provide the best information possible to enable conscious decision making and use the best tools to produce more, both in terms of quantity and quality.

The majority are a result of international scientific cooperation with research institutes and universities over the last 30 years. Having been used by farmers for several years in different climates and environments, they have proven their efficiency over time.

**PESSL INSTRUMENTS HAS MORE THAN 80 DISEASE MODELS FOR MORE THAN 35 CROPS, WHICH CAN BE ACCESSED DIRECTLY THROUGH THE [www.fieldclimate.com](http://www.fieldclimate.com) PLATFORM.**



To offer full support for plant protection management, we collaborate with the Swiss partner meteoblue. Plant disease models are thus based on highly precise weather forecast which is localized and calibrated on the monitoring site. A forecast of all the main meteorological variables and other agronomic information, such as the window for phytosanitary interventions, is provided on an hourly basis, for 7 days and updated each time the service is accessed on [fieldclimate.com](http://fieldclimate.com).

## WHAT YOU GET:

- **Highly precise weather forecast of all major meteorological variables**
- **Disease model calculation and other agronomic information**
- **Hourly forecast for 7 days**
- **Real time data at the time of accessing the service**

The spray window helps identify suitable periods for the application of crop protection measures by showing suitable (green), less suitable (yellow) and unsuitable (red) periods for application. The conditions are calculated from wind, precipitation, air temperature, relative humidity and delta T.

*Spray window*



## DISEASE MODELS FOR VITICULTURE

- **Downy mildew** (*Plasmopara viticola*) - Primary infection according to Cortesi, Hill et al.; secondary infection according to Arens, Blaser and Gehman; incubation period time according to Mueller and Sleumer)
- **Powdery mildew** (Powdery mildew risk according to Gubler and Thomas and powdery mildew risk modified to take into account the effects of *A. quisqualis*)
- **Grey mould**
- **Black rot**
- **Anthraxnose**
- **Leaf growth and rainfall accumulation**
- **Fungicide wash off**
- **Grape berry moth**

Information management in the vineyard is of key importance for the decision-making process. It leads to the production of high quality grapes and is the starting point of the production of fine wines.


We have been helping grape producers and wine experts in the management of their crop for more than 25 years, and were pioneers in producing weather stations capable of calculating disease models for downy mildew of the vine.

The models have been validated through the years of use in the wide range of wine-growing areas.

iMETOS 3.3 provides the raw data (rainfall, leaf wetness, temperature and humidity) that are used in the mathematical calculation of disease models. They are available through the fieldclimate.com platform - for the main plant diseases and insects.





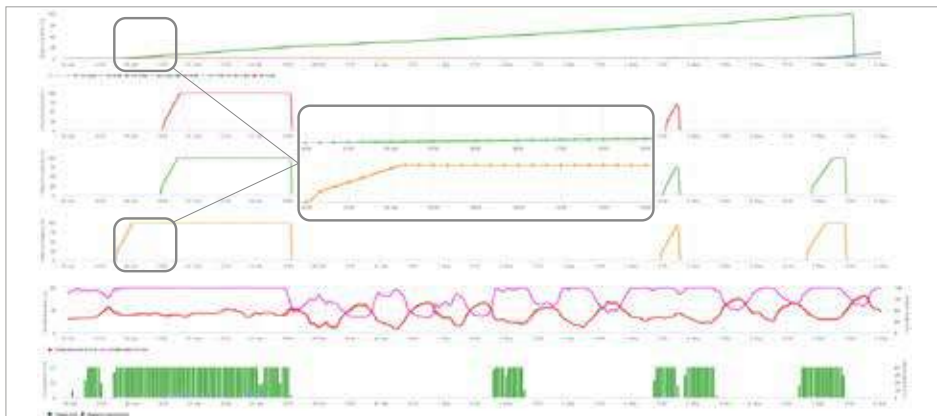

*In the graph you can see how a period with rainfall, long intervals of leaf wetness and high relative humidity combined with air temperature is followed by the development of a primary infection of peronospora. When the infection reaches 100%, the model begins to calculate the incubation period for this infection. When 100% incubation is reached, symptoms are visible on leaves (oil spots).*

## STATIONS & SENSORS

Basic sensor set needed for pest and disease monitoring: air temperature and relative humidity, rain gauge and leaf wetness. In some cases solar radiation, soil temperature and soil moisture sensors are also necessary. You can install these sensors on an iMETOS 3.3 IMT280 and  $\mu$ METOS CLIMA.



Through API, the data from METOS stations can be used on web platforms to provide plant disease models and DSS for plant protection.

## OTHER DISEASE MODELS

### APPLE



- Apple scab (*Venturia inaequalis*)
- Apple Codling moth (*Cydia pomonella*)
- Apple Aphids (*Aphis pomi*, *Dysaphis plantaginea*)
- Stroke of fire blight (*Erwinia amylovora*)
- Rainfall accumulation and leaf growth
- Chilling portions

### PEAR



- Pear scab (*Venturia pyrina*)
- Brown spot of pear (*Stemphylium vesicarium*)
- Stroke of fire blight (*Erwinia amylovora*)
- Rainfall accumulation and leaf growth
- Aphid risk
- *Fabraea* leaf spot

### CHERRY



- Blossom blight (*Monilia laxa*)
- Coryneum Blight (*Wilsonmyces carpophilus*)
- Rainfall accumulation and leaf growth
- *Cladosporium carpophilum* risk
- Powdery mildew risk
- *Taphrina* leaf curl
- Leaf spot (*Blumeriella jaapii*)
- Western flower thrips (*Frankliniella occidentalis*)
- Bacterial cancer (*Pseudomonas syringae*)
- Chilling portions

### CITRUS



- Alternaria rot (*Alternaria alternata*)
- *Colletotrichum acutatum*

### APRICOT, PRUNE & MIRABELLE



- Pocket or bladder Plum gall (*Taphrina pruni*)
- Rainfall accumulation and leaf growth
- Aphid risk
- *Xanthomonas arboricola* infection
- *Monilinia* risk
- Shot hole wilsonomyes carpophilus
- Powdery mildew risk
- *Taphrina* leaf curl
- Scab / *cladosporium carpophilum*
- Brown rot (*Monilia laxa*)
- Rust infection
- Chilling portions

### PEACH



- Peach leaf curl (*Taphrina deformans*)
- Peach Scab (*Cladosporium carpophilum*)
- Rainfall accumulation and leaf growth
- Aphid risk
- *Monilia* risk
- Powdery mildew
- *Sphaerotheca pannosa* risk
- Chilling portions

### OLIVE



- Olive scab (*Spilocea oleagina*)
- Anthracnose

### NUTS



- Walnut anthracnose (*Gnomonia leptostyla*)
- Walnut blight (*Xanthomonas arboricola* pv. *Juglandis*)
- Panicle and shoot blight
- Rust infection

**STRAWBERRY**

- Grey mould (*Botrytis cinerea*)
- Powdery mildew (*Podosphaera aphanis*)
- Rainfall accumulation and leaf growth
- Leather berry (*Phytophthora cactorum*)
- Chilling portions

**BLUEBERRY**

- Ripe rot (*Colletotrichum acutatum*)
- Rainfall accumulation and leaf growth
- Anthracnose (*Elsinoë veneta*)
- Chilling portions

**TOMATO IN OPEN FIELD**

- Late Blight (*Phytophthora infestans*)
- *Alternaria alternaria* (TomCast model)
- Root rot (*Phytophthora capsici*)
- Powdery Mildew (*Leveillula taurica*)
- Grey mould (*Botrytis cinerea*)
- Fruit rot
- Powdery mildew risk

**TOMATO IN PROTECTED FIELD**

- Late Blight (*Phytophthora infestans*) (California model and Pessl Instruments model)
- Grey mould (*Botrytis cinerea*)
- Leaf spot (*Septoria lycopersici*)
- Anthracnose (*Colletotrichum coccodes*)
- Leaf mould (*Cladosporium fulvum*)
- Powdery mildew risk

**MELON & WATERMELON, CUCUMBER, ZUCCHINI & PUMPKIN**

- Downy Mildew (*Phytophthora infestans*)
- *Alternaria*
- Powdery Mildew
- Grey mould risk

**PEPPER & EGGPLANT**

- *Alternaria alternaria* (TomCast model)
- Root rot (*Phytophthora capsici*)
- Powdery Mildew (*Leveillula taurica*)
- Grey mould (*Botrytis cinerea*)
- Fruit rot

**ONION**

- Downy Mildew (Millioncast model for *Peronospora destructor*)
- Botrytis leaf blight (*Botrytis squamosa*)
- Grey mould (*Botrytis cinerea*)
- Leaf blight (*Stemphylium vesicarium*)
- Purple blotch (*Alternaria porri*)

**LETTUCE**

- Downy Mildew (*Bremia lactucae*)
- Grey mould (*Botrytis cinerea*)
- Anthracnose (*Microdochium panattonianum*)

**CARROT & BEET**

- Carrot leaf blight (*Alternaria dauci*)
- Sugarbeet leaf spot (*Cercospora beticola*)

**ASPARAGUS**

- Purple spot (TomCast model and infection model for *Stemphylium vesicarium*)
- Botrytis (*B. cinerea*)
- Asparagus rust (*Puccinia asparagus*)

**RICE**

- Rice blast (*Magnaporthe grisea*)
- Sheath blight (*Rhizoctonia solani*)

**CORN**

- Corn leaf blight (*Helminthosporium, Bipolaris*)
- Ear rot (*Fusarium sp.*)

**WHEAT**

- Wheat Rusts (*P. graminis*, *P. tritici*, *P. striiformis*)
- *Fusarium* head blight (with mycotoxin alert)
- Septoria diseases
- *Pyricularia grisea*
- Anthracnose
- Aphid risk

**POTATO**

- Potato light blight (*Phytophthora infestans*) - Prediction of risky periods for infection and NoBlight model to define further application intervals
- *Alternaria solani* (TomCast model)
- Potato black leg (*Pectobacterium* aerial infection)
- Potato black leg (*Pectobacterium* soil infection)
- Colorado beetle
- Aphid risk



For more information visit: [metos.at/disease-models](https://metos.at/disease-models)



# Crop Models - Sensors Required

## SENSORS REQUIRED ►

	RAIN	AIR TEMP	RELATIVE HUMIDITY	LEAF WETNESS	BAROMETRIC PRESSURE	SOIL TEMPERATURE	SOIL MOISTURE	ETO EVAPOTRANS	SOLAR RADIATION
ALMOND	x	x	x	x					
APPLE	x	x	x	x					
APRICOT /PLUM/PRUNE/MIRABELLE	x	x	x	x					
ASPARAGUS		x	x	x					
AVOCADO	x	x	x	x					
BANANA	x	x	x	x				x	
BEETROOT		x	x	x					
BLUEBERRY	x	x	x	x					
BLACKBERRY	x	x	x	x					
CABBAGE/ oilseed Brassica sp.	x	x	x	x		x			x
CARROT/BEETROOT		x	x	x					
CHERRY	x	x	x	x			x		
CHILLI	x	x	x	x					
CITRUS	x	x		x					
CORN	x	x	x	x					
COFFEE	x	x	x	x					
COTTON	x	x	x	x					x
CUCUMBER	x	x	x	x					x
ELDERBERRY	x	x	x	x					
EGGPLANTS	x	x	x	x					
ELDERBERRY	x	x	x	x					
HAZELNUT	x	x		x					
HEMP	x	x	x	x		x			
KIWI		x	x	x					

## SENSORS REQUIRED ►

	RAIN	AIR TEMP	RELATIVE HUMIDITY	LEAF WETNESS	BAROMETRIC PRESSURE	SOIL TEMPERATURE	SOIL MOISTURE	ETO EVAPOTRANS	SOLAR RADIATION
LETTUCE	x	x	x	x					
LINUM	x	x	x	x		x			
MANGO	x	x	x	x					
MELON/CUCUMBER/ZUCCHINI/PUMPKIN	x	x	x	x					x
MIRABELLE	x	x	x	x					
NECTARINES	x	x	x	x					
OILSEED RAPE/Canola	x	x	x	x		x			
OLIVE	x	x	x	x					
ONION	x	x	x	x					
PEAR and QUINCE	x	x	x	x					
PAPRIKA /PEPPER/EGGPLANTS	x	x	x	x					
PEACH	x	x	x	x					
POMEGRANATE	x	x	x	x					
PISTACHIO	x	x	x	x					
PLUM	x	x	x	x					
PRUNE	x	x	x	x					
PUMPKIN	x	x	x	x					x
POTATO	x	x	x	x		x			x
PULSES	x	x	x	x		x			
RAPESEED	x	x	x	x		x			
RASPBERRY	x	x	x	x					
RICE	x	x	x	x					x
SOYA	x	x	x	x		x			x
STRAWBERRY	x	x	x	x					

## SENSORS REQUIRED ►

	RAIN	AIR TEMP	RELATIVE HUMIDITY	LEAF WETNESS	BAROMETRIC PRESSURE	SOIL TEMPERATURE	SOIL MOISTURE	ETO EVAPOTRANS	SOLAR RADIATION
SUNFLOWER	x	x	x	x		x			
SUGARBEET	x	x	x	x					
SUGARCANE		x							
TOBACCO	x	x	x	x					x
TOMATO - COVERED		x	x	x					
TOMATO - OPEN FIELD	x	x	x	x					
TOMATO - WARM CLIMATE OPEN FIELD	x	x	x	x					
TURF GRASS	x	x	x	x					x
VITICULTURE	x	x	x	x					
WALNUT/ALMONDS/PISTACHIOS	x	x	x	x					
WHEAT and Barley	x	x	x	x					x
ZUCCHINI	x	x	x	x					x

## INSECT MONITORING USING DEGREE DAYS/HEAT UNITS

Degree Days are used to predict insect life cycles, therefore used to target specific stages (larva, adult etc..) by insecticide treatments. Insects are exothermic (“cold-blooded”) organisms, that means their development is influenced by the surrounding temperature. Accumulation of so called “Degree Days” reflects those developments. For determination of species specific Degree Days, a minimum temperature is needed, at which the insect starts to develop at a so called “lower developmental threshold”, or baseline. The maximum temperature at which insects stop developing is called the “upper developmental threshold,” or cutoff. The lower and upper thresholds vary among species.

FieldClimate calculates with the input of those lower and upper developmental thresholds as well as starting date the accumulated Degree Days for each specific insect stage. METOS takes frequent measurements which are continuously integrated with the temperature and give very precise information for many management decisions. Heat units, chilling units and heat portion accumulations can be used also for fruit thinning and alternance management in tree fruits. The information can also be used for planning insecticide applications or the use of biological control agents (f.e. Trichogramma applications) and for growth stages of cultivated plants (f.e. wheat, corn, sugarbeet, etc..). The tool may also be used to monitor the heating and cooling costs of buildings, while annual figures can be used for estimating future costs. More information can be found under [en.wikipedia.org/wiki/Degree\\_day](https://en.wikipedia.org/wiki/Degree_day).

**Example of  
temperature  
accumulation as  
support for insects  
development  
monitoring**





# Animal Welfare

To meet the growing production demands with the increased focus on animal well-being it is crucial animal breeders constantly improve their existing practices, optimize production and improve-ensure the well-being of their animals. Early detection of stress indicators is crucial in the animal producing process and reacting at the slightest behavioural change is one of the best approaches to mitigating problems. Pessl Instruments offers solutions to cattle, swine and poultry breeders.



## POULTRY

We offer extended functionality of several advanced micro-electronics devices that can be integrated into a smart cloud-based system to create audio and video based stress detection of chickens on farms, facilitating the improvement of the breeding process and to prevent chicken's health hazards.

## DAIRY-CATTLE

Modern dairy cows are bred and fed for high productivity. As a result of this, the udders are a highly productive bioreactor. Along with milk, cow's highly active metabolism produces a lot of heat which must be transferred away from the cow. As a result of the need for higher productivity, the awareness of



dairy farmers to heat susceptibility of cows has increased. Optimum temperatures are in the range below 18°C. With temperatures above 24°C, significant reductions in herd productivity can be anticipated. With the help of Pessl Instruments products, all demands can be met.



## SWINE

The climate in a swine pen has a decisive influence on the ability to utilize the genetic potential of your mast or breeding pigs. High relative humidity, a breeze of cold air in the building, or a cold main body will negatively influence the health of the pigs. High temperatures in the building or in the feedlot will decrease the efficiency and conversion rate of the fattening pigs.


METOS products for continuous recording of all relevant data inside the buildings and holding parameters in the feedlot will help the farmer to stay in touch with his animals remotely 24/7. Automatic alerts will be sent in real-time if a defect of the heating or cooling systems happens.

## RECOMMENDED EQUIPMENT:

- **nMETOS 80** (See Technical catalog)
- **nMETOS 100** (See Technical catalog)
- **CropVIEW** (See Technical catalog)
- **iMETOS WorkTrack** (See Technical catalog)
- **Heavy Duty multiple-temperature probe** (See Technical catalog)

# SolGrader

Understanding how your crop is developing is essential in various aspects – from the obvious ones, estimating the profit, to broader such as food security. SolGrader app helps you predict the yield of your crop right on the spot and is an indispensable piece of equipment that will help you understand your yield and its quality better.

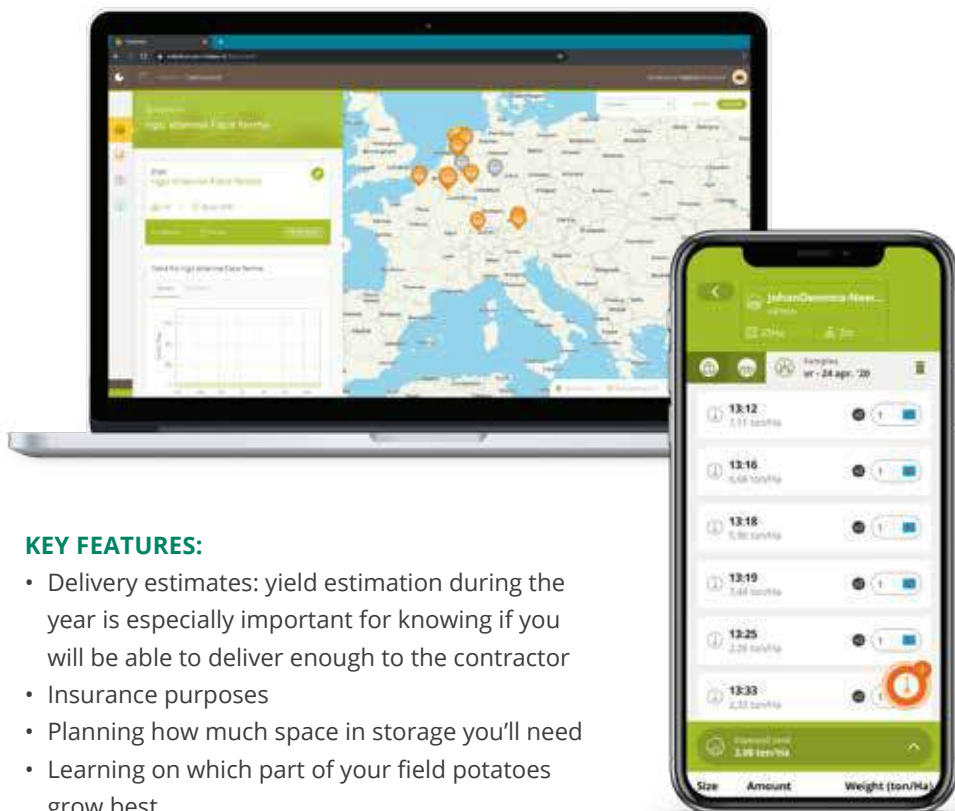


## KEY FEATURES:

- Delivery estimates: yield estimation during the year is especially important for knowing if you will be able to deliver enough to the contractor
- Insurance purposes
- Planning how much space in storage you'll need
- Learning on which part of your field potatoes grow best
- Estimating the effects of your cultivation practices – and understanding how to adapt them if needed

## HOW DOES IT WORK

The SolGrader app allows you to take photos of potatoes in the field and calculates the estimated yield of their crops and the size of the potatoes in the field – without needing to move potatoes to other location. The app will calculate the total yield of your potato lot easier and more precise. By means of a photo, the length, width, and measured weight per potato are calculated. Based on the entered data of the field, the expected yield is given.

The photo must be made on a special blue mat with a red square and an app with a simple overview of all your lots with the calculated sizes and yield.

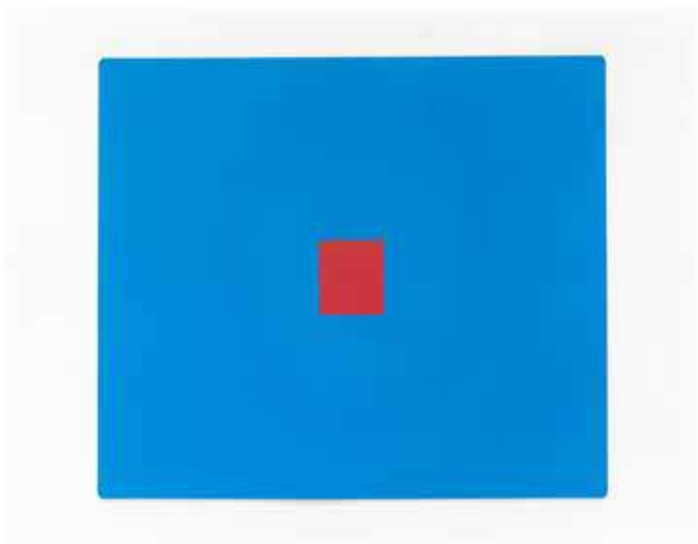

*\* The SolGrader app allows you to take photos of other similar shaped vegetables and fruits (onions, beetroots, apples, avocado, strawberries, ...). It calculates the estimated yield of the crops and their size – without needing to move the crop from the field to another location.*

# Integrations


FieldClimate is one of the first and world-wide web platforms specifically designed for collecting-analyzing, and displaying agronomic, meteorological, soil, insect and tracking data from the farm, field or environment.

Available in multiple languages for tens of thousands of METOS weather station owners, it also can integrate data from third party weather stations- sensors and allows the customer to use the rich array of actionable tools in FieldClimate, e.g. disease models, irrigation, soil moisture monitoring, precision forecasts and work planning tools.

**“THE INTEGRATION WITH VARIOUS SMART-AGRI SOLUTIONS DIRECTLY PROVIDES FARMERS WITH ACTIONABLE TOOLS, HELPING THEM EASE THE FARM MANAGEMENT PROCESSES, SAVE RESOURCES, AVOID COSTLY ERRORS AND EARN THE MOST OUT OF THEIR HARD WORK.”**

## JOHN DEERE

John Deere Operations Center portal can display your METOS device information seamlessly. Simply grant your John Deere account to receive data updates from selected METOS devices. The latest sensor data can then be visualized by members of the selected John Deere organization at any time. The access grant can be revoked and synced devices can be activated and deactivated at any time.

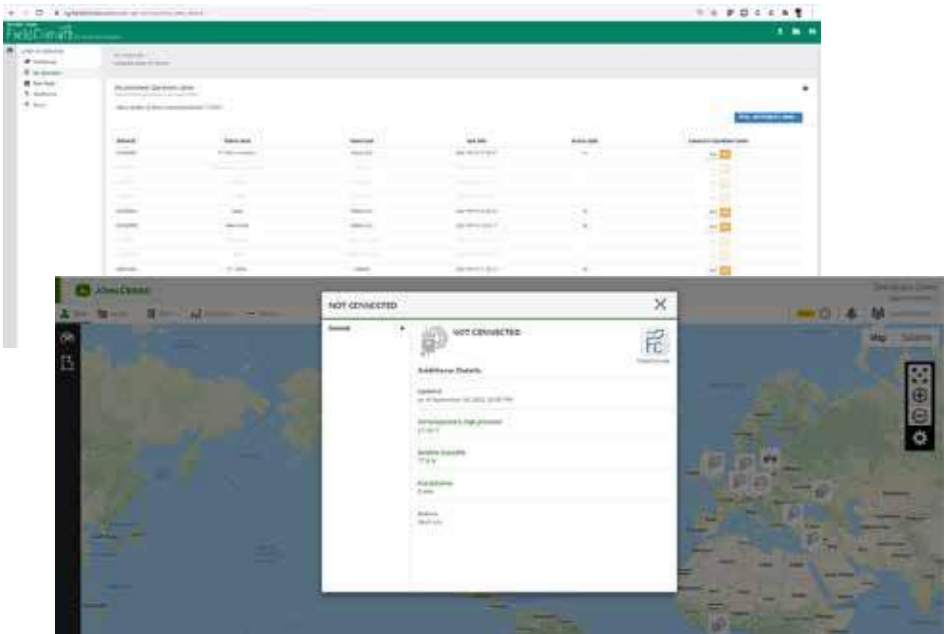

## DAVIS INSTRUMENTS

The WeatherLink integration is a data pull from Davis Instruments, which uploads your Davis Instruments data into your FieldClimate account.

This ingested service requires a license because data is integrated into FieldClimate servers, which then offers the user a rich array of actionable tools available in FieldClimate, e.g. disease models, irrigation, soil moisture monitoring, precision forecasts and work planning tools.



## AZURE FARMBEATS

Simple weather data, from your FieldClimate account, is forwarded for user-selected METOS devices, seamlessly to your connected Azure FarmBeats account.




## HORTA

Horta provides highly-specialized services to the agricultural and agri-industrial sectors, which increases their competitiveness and sustainability while guaranteeing and enhancing food safety. Horta is a spinoff of the Università Cattolica del Sacro Cuore and was started in 2008 by five founding members, whose goal is to translate innovative research results into agricultural practices. Pessl Instruments and Horta have been working together for over a decade on hardware sales in Italy and other countries and Pessl Instruments now offers actively all the DSS (Decision Support System) from Horta to our clients.

## RIMpro

RIMpro is a DDS (decision support system) that models a wide range of pests and diseases of fruit trees and vineyards. You now can connect the METOS weather stations to RIMpro' DSS thus allowing the user to evaluate the risk of each pest and disease for your crop and farm.

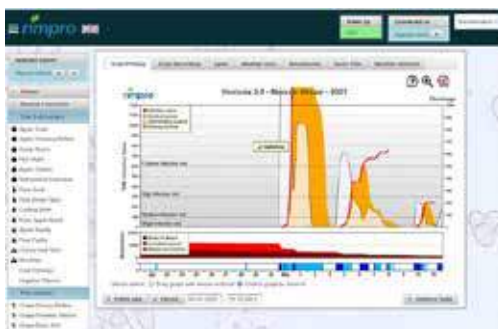



## XARVIO™

xarvio FieldManager can potentially use METOS station data for plant protection and climate-data-related services.


A special security key mechanism is used to create a data share in FieldClimate with xarvio FieldManager. The security key is used in turn in xarvio FieldManager to allow the regular pull of data for the selected devices.

### INSECT MONITORING

It pairs the unique hardware and software capabilities of Pessl, specifically iSCOUT® pest trap, with the image recognition and analysis of BASF's Xarvio™ SCOUTING app. By combining the experience, precision data and advanced digital expertise offered by both companies in pest management, farmers are provided with near real-time; field-level insect observations to further optimize crop production.

### WEATHER MONITORING

Enabling the connection of weather station devices from both recognized companies, increases choice among compatible weather stations for Xarvio® FIELD MANAGER customers. It also enhances crop production decisions, as hyper-local weather data from connected devices is seamlessly integrated into Xarvio's agronomic algorithms and models.

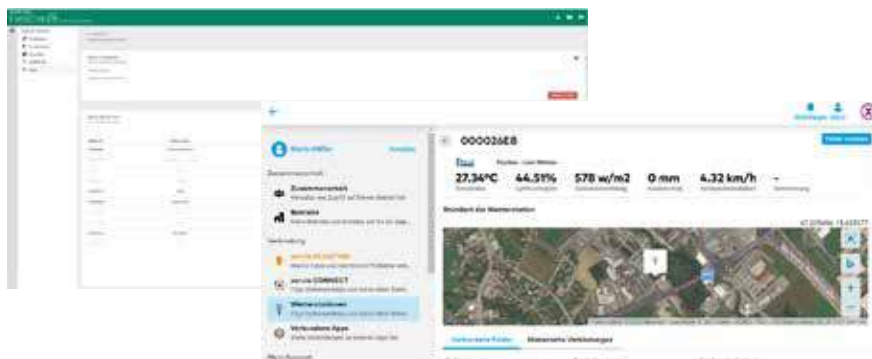


## Myirrigation

The Myirrigation platform provides a complete workbench to manage irrigation and includes data display of actual weather, weather forecast, soil moisture sensors, water meters and all other sensors that are displayed in FieldClimate. The data from FieldClimate are taken through API.

Sentinel satellite images are integrated. Advanced features as data reports, soil moisture balance (FAO 56), and irrigation plan. Fields can be uploaded using different georeferenced file formats.

It is the communication platform between irrigation managers and the field staff that implement the irrigations. Field notes and field visit reports are an essential to register progress of crop development and its response to irrigation facilitating the decision-making process for irrigation management.

It is available in English, French, Portuguese (PT and BR), and Russian. Web version and APP for IOS and Android are included. For more information visit [aquagri](http://aquagri.com).

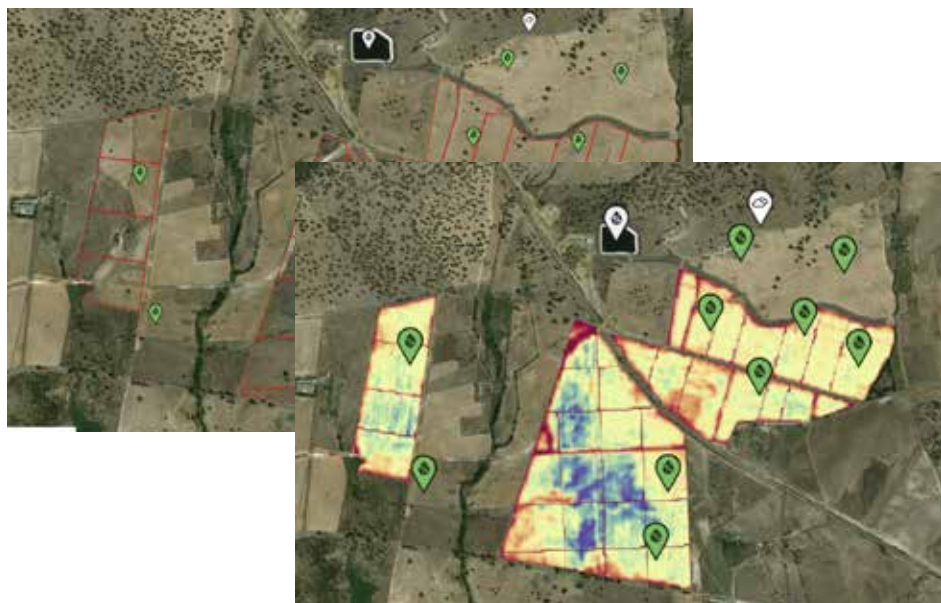


# API for Partners

## API - ACCESSING PURE DATA & SERVICES TO ENABLE CUSTOM INTEGRATIONS

The FieldClimate API is a HTTP/S web service where authenticated and authorized web clients can retrieve METOS data and licensed services via JSON format. Updating device configurations is possible as well. The FieldClimate portal, the FieldClimate mobile apps and a data push to John Deere Operation Center are some prominent API example use cases.

For stability reasons, the API is versioned. Two ways of user authorization are supported:

- HMAC access based on a private and public key often used for machine-to-machine integrations and
- OAuth 2.0 which requires FieldClimate client credentials for getting a temporary access token for your pre-registered app (contact [api@metos.at](mailto:api@metos.at)).

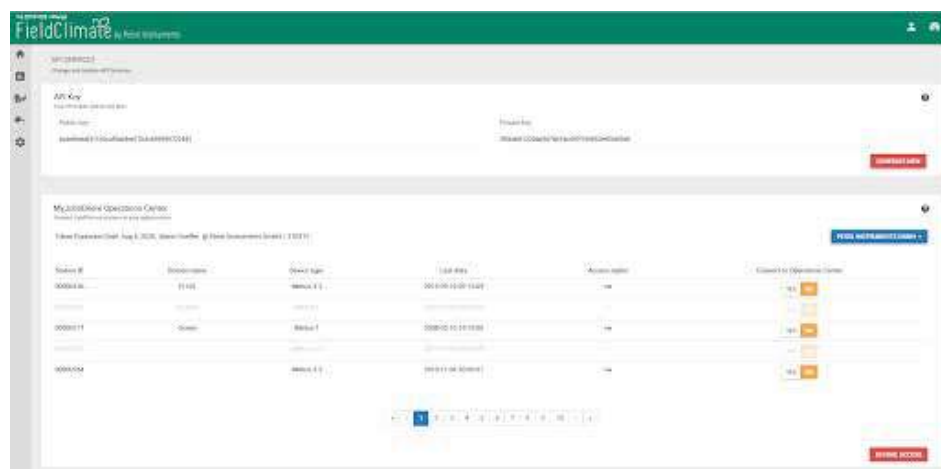

The FieldClimate API is used by hundreds of 3rd party software clients in order to see METOS station data in their specific software solutions and platforms for various use cases. Device owners are also the owners of the captured data and thus get free API access to their data hosted on the Pessl Instruments Cloud located in Graz (Austria).

```

GET https://api.fieldclimate.com/v2/docs/
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591
2592
2593
2594
2595
2596
2597
2598
2599
2600
2601
2602
2603
2604
2605
2606
2607
2608
2609
2610
2611
2612
2613
2614
2615
2616
2617
2618
2619
2620
2621
2622
2623
2624
2625
2626
2627
2628
2629
2630
2631
2632
2633
2634
2635
2636
2637
2638
2639
2640
2641
2642
2643
2644
2645
2646
2647
2648
2649
2650
2651
2652
2653
2654
2655
```


# efesaro

Web: [www.efesaro.com](http://www.efesaro.com)

Email: [info@efesaro.com](mailto:info@efesaro.com)

Tel: +34 639 87 46 47

WWW.METOS.AT

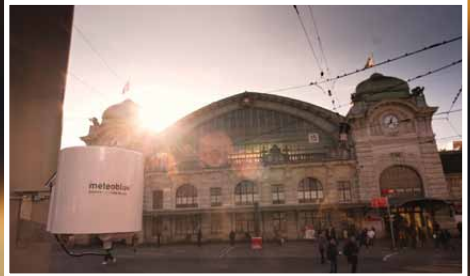

Values may be changed without prior notice. All rights reserved. Copyright Pessl Instruments GmbH

Pessl Instruments GmbH, Werksweg 107, 8160 Weiz

Tel: +43 (0) 3172 5521 • Fax: +43 (0) 3172 5521 23 • Email: [office@metos.at](mailto:office@metos.at)